
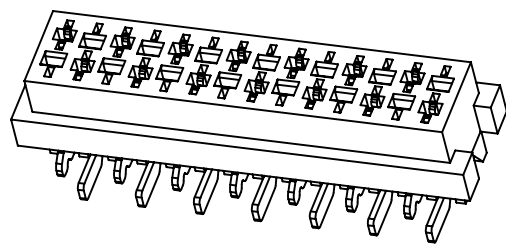





Pin No.	A	B	C
4	7.10	3.81	5.60
6	9.64	6.35	8.14
8	12.18	8.89	10.68
10	14.72	11.43	13.22
12	17.26	13.97	15.76
14	19.80	16.51	18.30
16	22.34	19.05	20.84
18	24.88	21.59	23.38
20	27.42	24.13	25.92

Specifications:
 Current rating:1.0A AC,DC
 Voltage rating:250V AC, DC
 Contact testance:20m ohm Max
 Insulation resistance:1000M ohm Min
 Withstanding voltage:AC 500V AC/minute
 Operating Temperature:-40°C ~ +105°C
 Materials:
 Insulator:High Temp Plastic UL94V-0
 Contact material:Phosphor Bronze
 Finish:Tin Plated

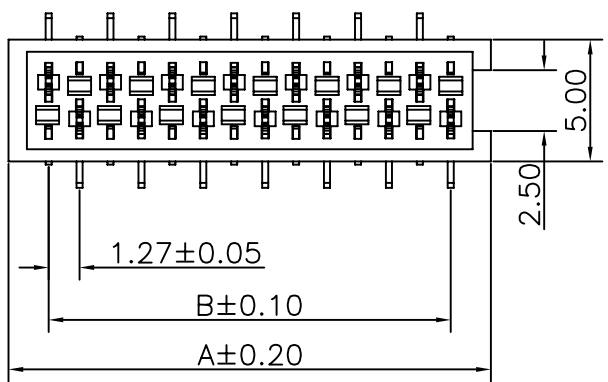

MIM-SV-xx-LF
 LEADFREE

RoHS Compliant

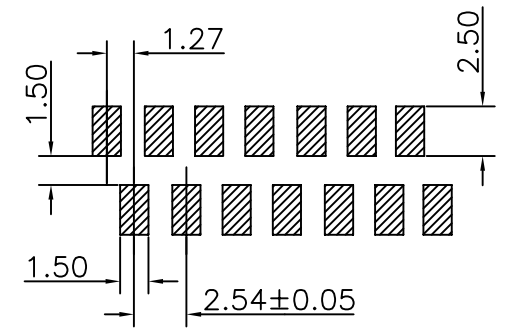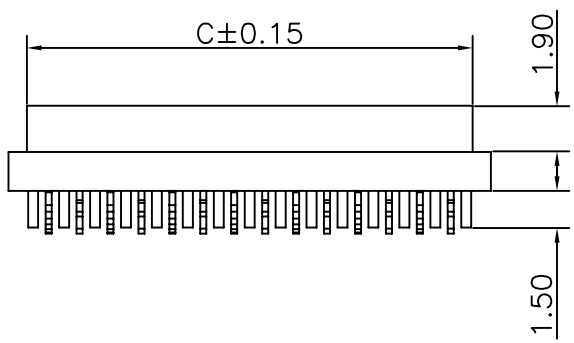

PART NO. MIM-SV-xx		CHECKED BY CY		TOLERANCES ARE		DESCRIP TION; 2.54mm Micro-Match Miniature SMD Type					
DWG NO. MIM-SV-xx		DRAWING BY		.X ± 0.2 .XX ± 0.15 .XXX ± AWG		AREA					
FILE NO.		PROJECTION				REVISIONS		HK		DATE	
UNIT / mm		SCALE 1:1									

煜倫股份有限公司