
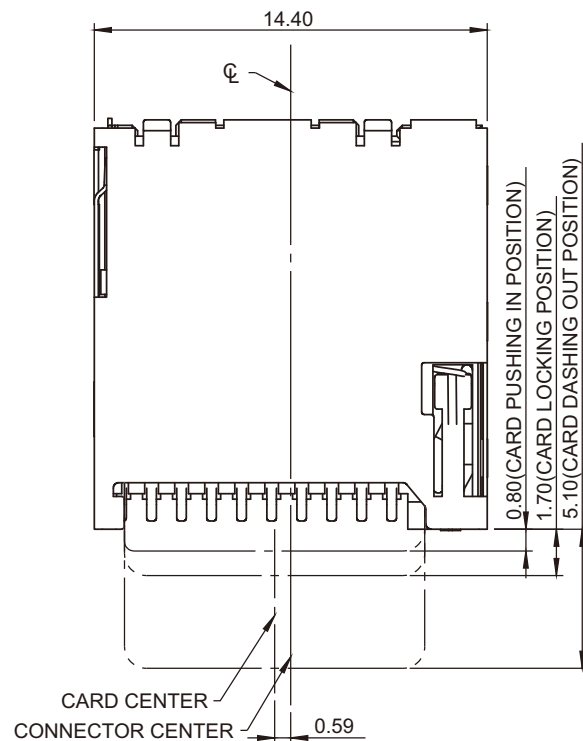
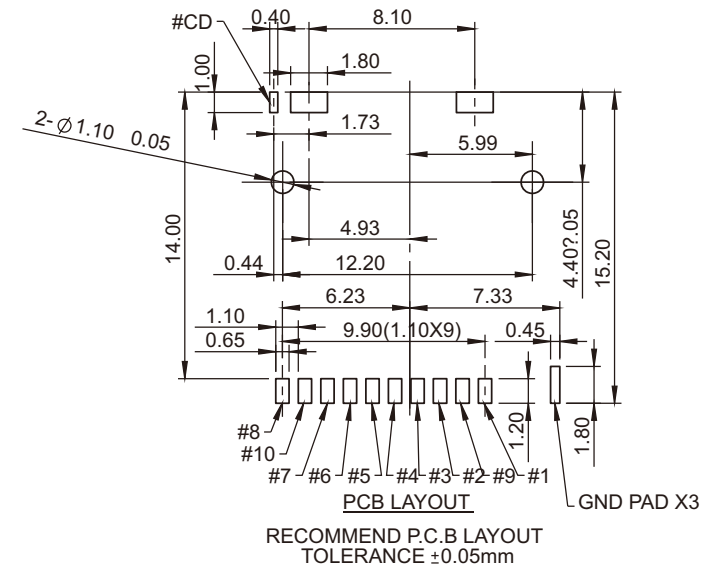


Pin Assignment:	
#1	DTA2
#2	DAT3
#3	CMD
#4	VDD
#5	CLK
#6	VSS
#7	DAT0
#8	DAT1
#9	RFIO4
#10	RFIO4
#CD	CD

NOTES:
1. MATERIAL:
INSULATOR: HIGH TEMPRATURE THERMOPLASTIC,
UL94V-0, BLACK
CONTACT: PHOSPHOR BRONZE



CIRCUIT:

WITOUT CARD		CARD INSERTED	
CD	○	CD	○
	○		○
	GROUND		GROUND

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.35
X. ± 0.30
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TFC-WPCP12B-08-LF
SERIES TFC WPCP12B 08 LF
90°SMT 08WAY LEADFREE
C LAYOUT POST 12.2mm
PUSH PUSH SWITCH OPEN

DESCRIPTION: microSD A&B Type & T-Flash Push-Push Connector