


$A = 11.65(m/m) \times P + 2.50(m/m)$
 $B = 11.65(m/m) \times P + 0.5(m/m)$
 $C = 11.65(m/m) \times (P - 1)$
 $P = \text{NUMBER OF PORTS}$

MATERIAL: HOUSING-PBT POLYESTER UL94V-0
 MIXED GLASS FIBER,
 STANDARD COLOR-GRAY,
 CONTACTS-0.45mm DIAMETER PHOS-BRONZE
 PLATED WITH HARD GOLD.
 CAVITY CONFORMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

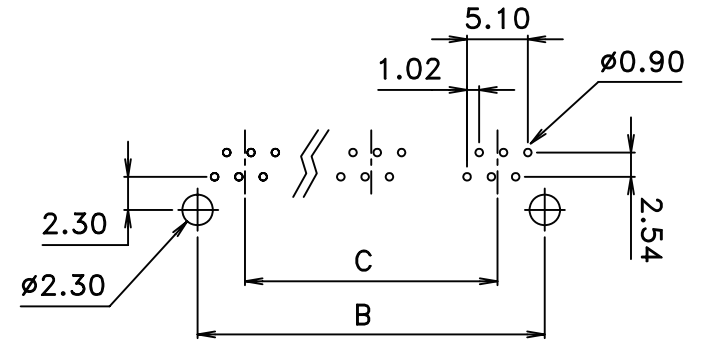

PC Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

PROJECTION

X. ±
 .X ± 0.25
 .XX ± 0.13
 .XXX ± 0.05
 ANG ±



ORDER INFORMATION

MJ14Ax-xE06-06xx-LF

SERIES

2:2 PORTS

⋮

EAR

G:GRAY
 K:BLACK

0602:6P2C
 0604:6P4C
 0606:6P6C

LEADFREE

06u" GOLD

DESCRIPTION: 6POSITION GANGED MINI LOW PROFILE
 SIDE ENTRY PCB JACK FROM 2PORTS UP