

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.05\text{mm}$

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Rivet,Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u"~100u" Nickel

Contact Area: 1u"~30u" Selective Gold

Solder Tails Area: 100u"~200u" Tin(Lead Free)

ELECTRICAL

Operation Voltage: 250 VAC Max.

Current Rating:

TEMP(°C)	20	70	100
CURRENT	2.0A	1.6A	1.0A

Contact Resistance: 20 mohms Max.

Insulation Resistance: 3000 Mohms Min. @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / Minute

Temperature Range: -55°C TO +125°C

NOTE:

PART NO.	A	B	C
UC-SRZ-2X32	88.90	94.00	85.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

X.±


.X±

.XX±

.XXX±


ANG±

PPOJECTION



ORDER INFORMATION

UC-SRZ-2X32-LF

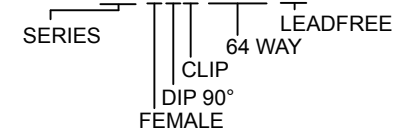

DESCRIPTION: