

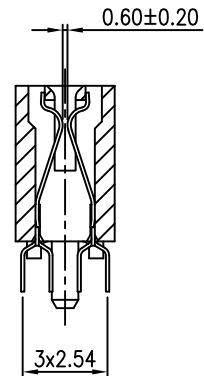


METAL CLIP

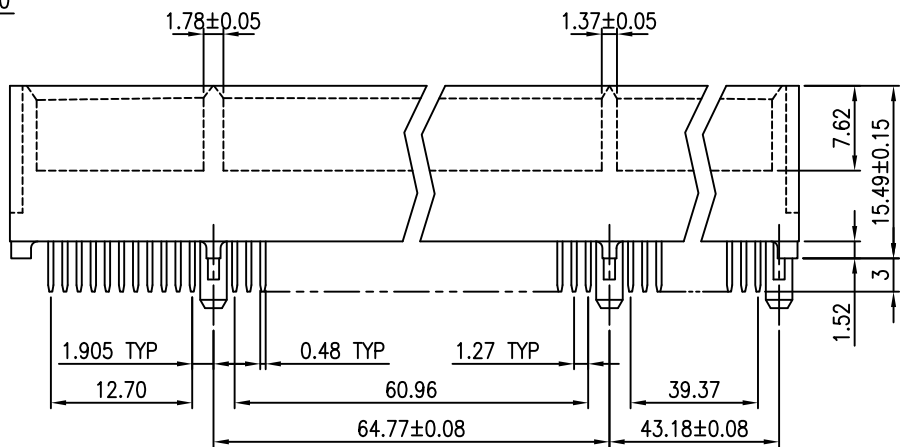

PLASTIC POST

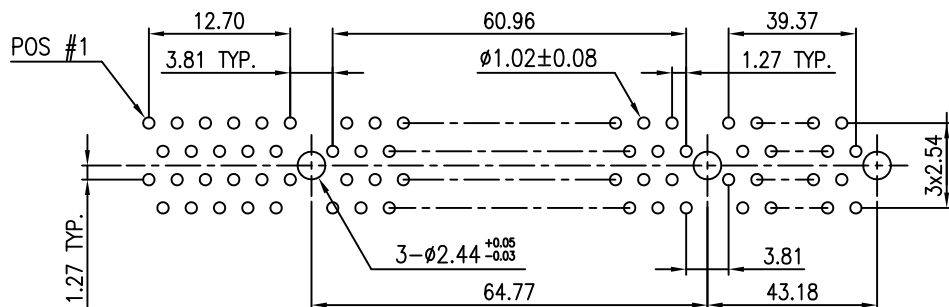

MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC,
UL94V-0 RATED.
CONTACT: COPPER ALLOY.
PLATING: MATING AREA- GOLD OVER NICKEL,
SOLDER AREA- TIN OVER NICKEL.

ELECTRICAL

VOLTAGE RATING: 250 VAC RMS.
CURRENT RATING: 3 AMP.
INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
CONTACT RESISTANCE: 30 MILLIOHMS MAX.

MECHANICAL

CONTACT RETENTION: 460 GRAMS MIN PER CONTACT.
INSERTION FORCE: 230 GRAMS MAX PER CONTACT PAIR.
WITHDRAWAL FORCE: 15 GRAMS MIN PER CONTACT PAIR

ENVIRONMENTAL

TEMPERATURE RANGE: -55°C TO $+85^{\circ}\text{C}$.
SOLDERABILITY : $260^{\circ}\text{C} \pm 5^{\circ}\text{C} / 10\text{sec} \pm 1\text{sec}$.

PCI-D-184V3-LF
LEADFREE

RoHS Compliant



PART NO. PCI-D-184V3		CHECKED BY CY	TOLERANCES ARE .X \pm 0.2 .XX \pm .XXX \pm AWG	DESCRIPTION: 64 BIT PCI CARDEDGE, 3.3V		
DWG NO. PCI-D-184V3						
FILE NO.		PROJECTION	AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1					

煜倫股份有限公司