

Specifications:

Current Rating:3.0A AC/DC  
 Voltage Rating:250 AC/DC  
 Contact Resistance:20m ohm. max.  
 Insulation Resistance:1,000M ohm. min.  
 Dielectric Withstanding:600V AC/Minute  
 Operating Temperature Range:-40°C ~ +105°C  
 Materials:


Insulator:High Temp. Plastic (PBT UL94V-0)  
 Insulator Color:Black  
 Contact:Brass  
 Plating:Gold Plated

FL-RSG-xx-LF  
 LEADFREE  
 G:FULL/GOLD

RoHS Compliant

Dimension :

Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B
6	15.24	5.08	16	27.94	17.78	34	50.80	40.64
8	17.78	7.62	20	33.02	22.86	40	58.42	48.26
10	20.32	10.16	24	38.10	27.94	50	71.12	60.96
12	22.86	12.70	26	40.64	30.48	60	83.82	73.66
14	25.40	15.24	30	45.72	35.56	64	88.90	78.74

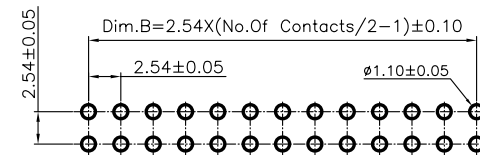

Recommended PCB Layout



PART NO. FL-RSG-xx

DWG NO. FL-RSG-xx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION: 2.54mm Box Header Right Angle Type

FILE NO.

DRAWING BY

.X ± 0.2  
.XX ± 0.1  
.XXX ±  
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

