


**MATERIAL**  
 INSULATOR: PBT UL 94V-0 Or PPS  
 SHELL: Brass, Nickel/Tin plated Or Tin Plated  
 CONTACT: Phosphor Bronze, Gold/Tin plated

**ENVIRONMENTAL**  
 OPERATING TEMPERATURE: -55°C~+105°C

**ELECTRICAL**  
 CONTACT CURRENT RATING: 1 Amp  
 DIELECTRIC WITHSTANDING : AC 1000V/min. R.M.S.  
 INSULATION RESISTANCE: 500MV/min. at 500V DC  
 CONTACT RESISTANCE: 30mV Max

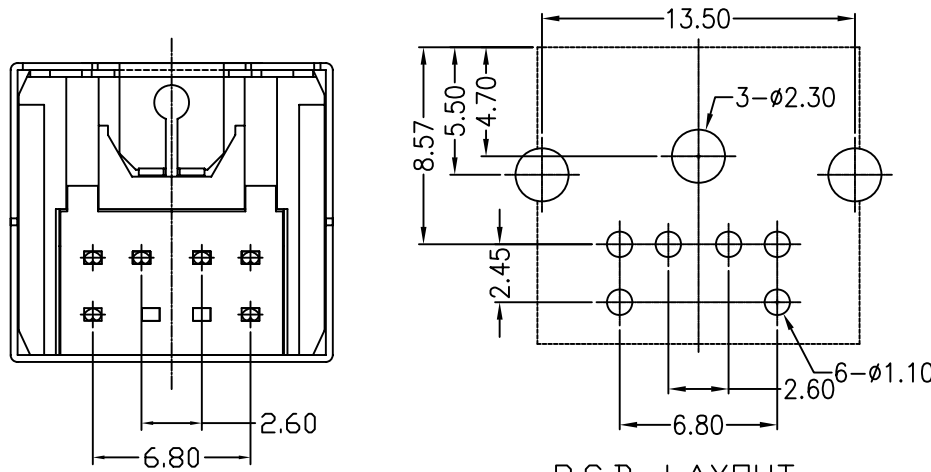

P.C.B. LAYOUT  
 BOTTOM VIEW

ORDER INFORMATION:

PART NO:	A PLATING	B PLATING	INSULATOR COLOR	INSULATOR
MDJ-FPP-06	NICKEL PLATED	TIN PLATED	PURPLE	PBT

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X.±  
 .X±  
 .XX±  
 .XXX±  
 ANG±

PJECTION



ORDER INFORMATION

MDJ-FPP-06-LF  
 SERIES | LEADFREE  
 | 06WAY  
 | PURPLE  
 FULL METAL

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 迷你單層6P母半金黑(鐵殼鍍錫無嘜不加彈)