

NOTE:

- 1.MATERIAL:
  - 1-1.HOUSING: LCP.
  - 1-2.CONTACT: BRONZE.
  - 1-3.SHELL: BRASS.
- 2.PLATING:
  - 2-1.CONTACT: CONTACT AREA SEE TABLE A/SOLDER AREA GOLD FLASH. UNDER NICKEL 50u"MIN.
  - 2-2.SHELL: NICKEL 60u" MIN.
- 3.SAFETY:
  - 3-1.CONTACT RESISTANCE: CONTACT 30mohm MAX. SHELL 50mohm MAX.
  - 3-2.INSULATION RESISTANCE: UNMATED 100Mohm MIN. MATED 10Mohm MIN.
  - 3-3.DIELECTRIC STRENGTH: 500 Vac MIN.
  - 3-4.CURRENT RATING: 0.5A MIN.

BOM	
19	CONTACT
E1	SHELL
1	HOUSING
数量	零件

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE


SIZE A4

X.±  
.X±  
.XX±  
.XXX±  
ANG±

PJECTION



ORDER INFORMATION

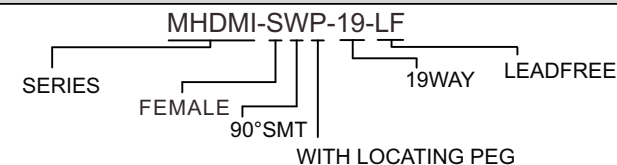

DESCRIPTION: HDMI 19P (F) Dip