
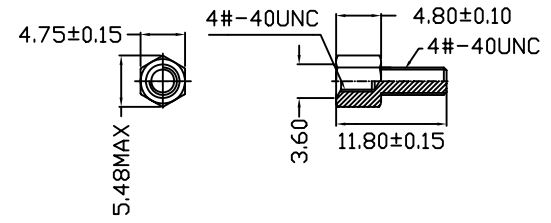
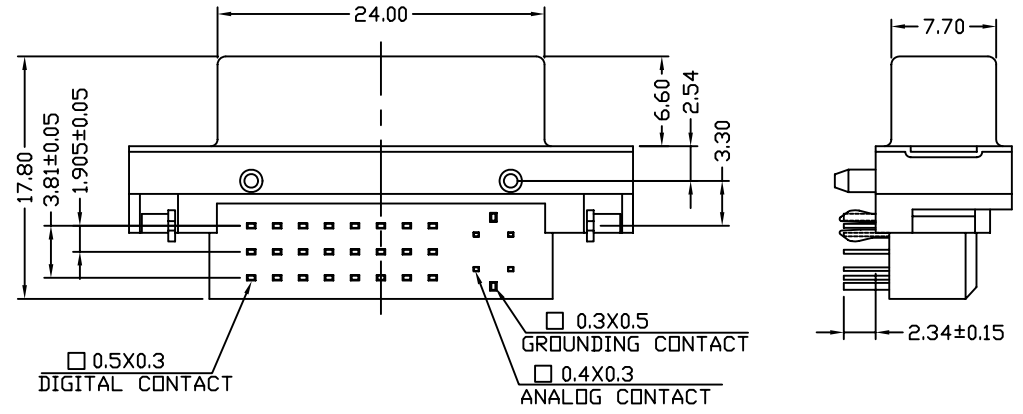
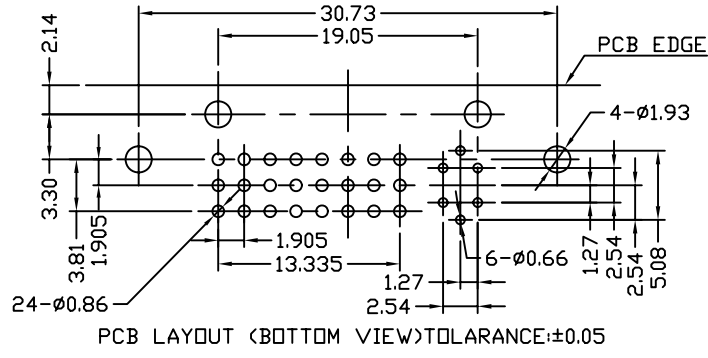


NOTES:

- 1.MATERIALS:  
 INSULATOR: GLASS FIBER REINFORCED THERMOPLASTIC  
 LCP UL94V-0.  
 CONTACT: PHOSPHOR BRONZE, GOLD FLASH ON CONTACT,  
 TIN PLATED ON TAIL 100u", OVER NICKEL PLATED 50u".  
 SHELL: STEEL, NICKEL PLATED.  
 BOARDLOCK: BRASS, TIN PLATED.  
 RIVET: BRASS, NICKEL PLATED.
- 2.ELECTRICAL:  
 INSULATION RESISTANCE: 1000 MEGOHMS MINIMUM  
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC  
 VOLTAGE RATING: 40 VOLTS AC(RMS) MAXIMUM  
 CURRENT RATING: 3.0 AMPS PER CIRCUIT  
 CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM
- 3.MECHANICAL PERFORMANCE:  
 MATING FORCES: 4.5kgf MAXIMUM  
 UNMATING FORCES: 1kgf MINIMUM, 4kgf MAXIMUM  
 DURABILITY: 100 CYCLES MINIMUM
- 4.ENVIRONMENTAL:  
 TEMPERATURE RANGE: -20°C TO +85°C

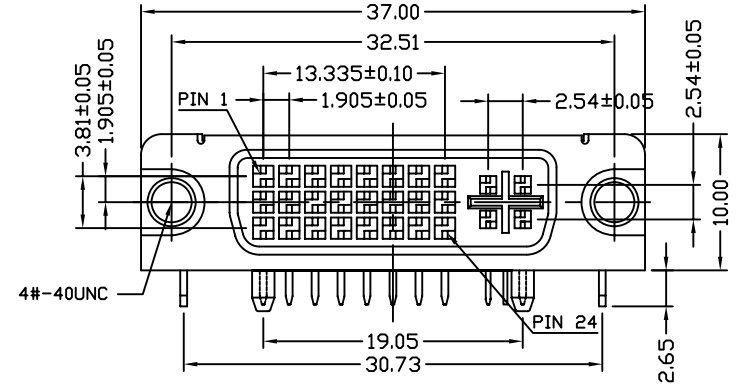

PART NO.	DVI-SRNH-24+5
DWG NO.	DVI-SRNH-24+5
FILE NO.	
UNIT / mm	SCALE 1:1

CHECKED BY	CY
DRAWING BY	
PROJECTION	

TOLERANCES ARE  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ±  
 AWG

DESCRIPTION:	DVI 24+5Pin 90度母座無後鐵殼(BC)			
AREA	REVISIONS	HK	DATE	

焜倫股份有限公司