


Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C.

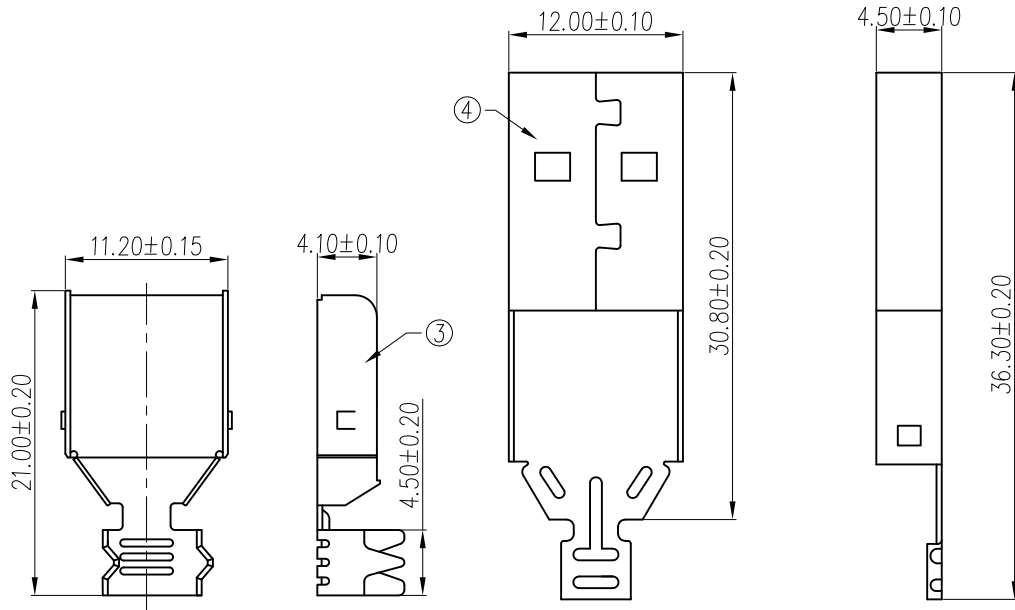

No.	Name	Q'ty	Material	Remarks & Thickness	Finish
4	Back-shell	1	Cold Rolled Steel	T=0.35mm	Cu:40u"min. 80u"min Nickel Plated
3	Front-shell	1	Cold Rolled Steel	T=0.35mm	Cu:40u"min. 80u"min Nickel Plated
2	Contact	4	Brass	T=0.20mm	Contact area:30u"min Gold Plated over 40u"Nickel min. Solder area:80u"min Tin Plated over 40u"Nickel min.
1	Housing	2	P.B.T	UL 94-V0	White

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20


DATE

.XXX ± 0.10

ANG ± 1°

SIZE A4

PJECTION



ORDER INFORMATION

USB-PSWHS30-4A-LF

SERIES | | | LEADFREE
| | | 4 PIN A TYPE
| | | SEMI GOLD 30u"
WHITE
SOLDER
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: