


1 2 3 4 5 6 7 8 9 0


J  
I  
H  
G  
F  
E  
D  
C  
B  
A

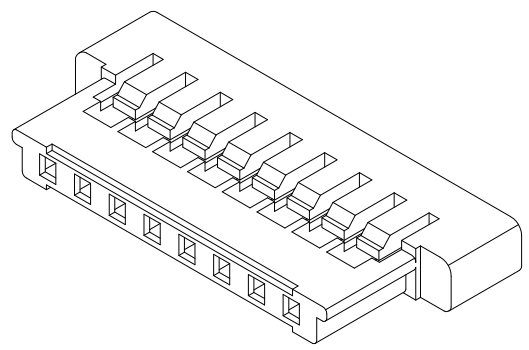

**SPECIFICATIONS**  
 Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
<b>FI-H-02</b>	1.25	3.80	6.00
<b>FI-H-03</b>	2.50	5.05	7.25
<b>FI-H-04</b>	3.75	6.30	8.50
<b>FI-H-05</b>	5.00	7.55	9.75
<b>FI-H-06</b>	6.25	8.80	11.00
<b>FI-H-08</b>	8.75	11.30	13.50
<b>FI-H-10</b>	11.25	13.80	16.00
<b>FI-H-15</b>	17.50	20.05	22.25
<b>FI-H-20</b>	23.75	26.30	28.50
<b>FI-H-25</b>	30.00	32.55	34.75
<b>FI-H-30</b>	36.25	38.80	41.00

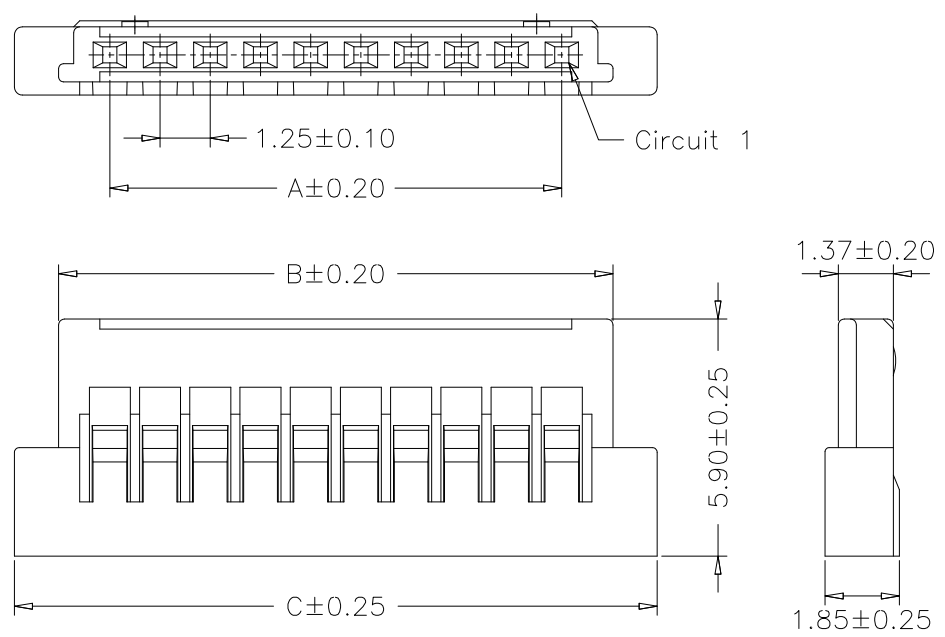

PART NO. **FI-H-xx**  
 DWG NO. **FI-H-xx**  
 FILE NO.  
 UNIT / mm    SCALE 1:1

CHECKED BY CY  
 DRAWING BY  
 PROJECTION

TOLERANCES ARE  
 .X ± 0.2  
 .XX ±  
 .XXX ±  
 AWG

DESCRIPTION: **1.25mm PITCH HOUSING  
 ULTRA LOW PROFILE**

AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司