


MATERIAL AND FINISH

- * HOUSING: LCP, PCT, PBT(UL 94V-0)
- * CONTACT: PHOSPHOR BRONZE TIN PLATING 120 MICRO INCH
- * CONTACT: PLATING TIN PLATING OVER NICKEL

PERFORMANCE SPECIFICATION

- * CURRENT: 1 AMPERE MAX
- * OPERATING TEMPERATURE: -56°C TO +106°C
- * INSULATION RESISTANCE: 10000 MEGOHMS MIN. INITIAL
- * NORMAL FORCES: 200GRAMS MIN. ON TIN, TIN AND INTERFACE
- * DURABILITY: 40 CYCLES MIN
- * METAL LATCH: PHOSPHOR BRONZE WITH NICKEL PLATED

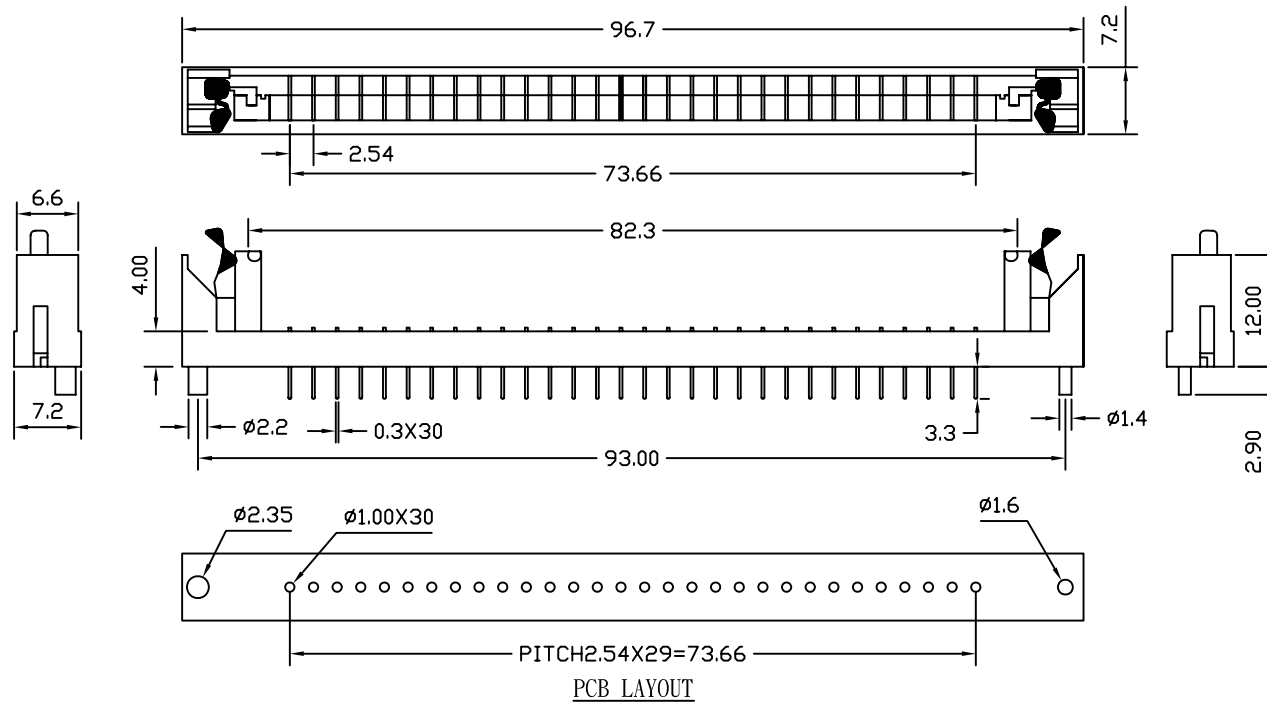

SIM-D-1X30-LF
LEADFREE

RoHS Compliant



PART NO. SIM-D-1X30

DWG NO. SIM-D-1X30

APPROVED BY CY

TOLERANCES ARE

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.2
.XXX
AWG

DESCRIPTION: SIMM 1X30 PIN

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA

REVISIONS

HK

DATE