



PCB Layout  
(Top View)

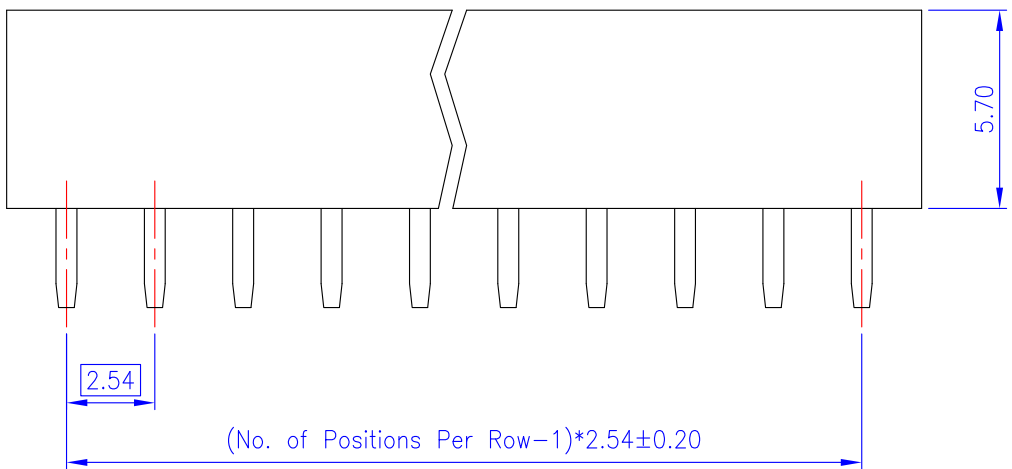

**Material and Finish**

- 1. Housing: PBT (UL94V-0), Black.
- 2. Terminal: Copper Alloy (t=0.40mm), Gold Plating

**Electrical Characteristics**

- 1. Current Rating: 3.0 Amp. Max..
- 2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
- 3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.
- 4. Contact Resistance: 30m Ohms Max.

**Mechanical Characteri**

- 1. Operating Temperature: -55°C ~ +1

F-D57-1Xxx-LF  
LEADFREE  
RoHS Compliant

	PART NO. F-D57-1Xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: 2.54mm Post Header Receptacle PCB Mount Vertical Type Single Row (H=5.70mm)	AREA	REVISIONS	HK	DATE
	DWG NO. F-D57-1Xxx								
焜倫股份有限公司	FILE NO.		PROJECTION						
	UNIT / mm	SCALE 1:1							