

NO.	NAME	MATERIAL	FINISH	Q'TY
1	GROUND TERM.	PHOS.BRONZE 0.50	TIN PLATED	1
2	SPRING TERMINAL	PHOS.BRONZE 0.25	TIN PLATED	2
3	SPRING TERMINAL	PHOS.BRONZE 0.25	SILVER PLATED	2
4	SPRING TERMINAL	PHOS.BRONZE 0.25	SILVER PLATED	2
5	SPRING TERMINAL	PHOS.BRONZE 0.30	TIN PLATED	2
6	TERMINAL	BRASS 0.3mm	TIN PLATED	4
7	TOP HOUSING	NYLON PA66(ASV0)	SEE ODDOR	1
8	BOTTOM HOUSING	NYLON PA66(ASV0)	SEE ODDOR	1
9	BOTTOM COVER	PBT G.F.	BLACK	1
10	FRONT SHELL	SPCC 0.3mm	NICKEL PLATED	1
11	BACK SHELL	BRASS 0.3mm	NICKEL PLATED	1
12	GROUND TERM.	PHOS.BRONZE 0.25	TIN PLATED	2

MODEL NO.	PJ-2511PA_-9-L (PC99 ODDOR & PANTONE)
	A
HOUSING TOP	LIME;577C
HOUSING BOTTOM	PINK;701C

Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max.1KHz

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V,2A Max ; AC 100V,1A Max.

Dielectric Withstanding Voltage: 500V AC For 1 Minute.

Durability (Life Test):

A: For Phosphor Bronze 1500 Cycles Minimun.

B: For PBS 2000 Cycles Minimun.

Insertion Force: 0.3~3.0 Kg.

Extraction Force: 0.3~3.0Kg.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.38

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.13


DATE

.XXX ± 0.05


ANG ±

SIZE A4

PJECTION



ORDER INFORMATION

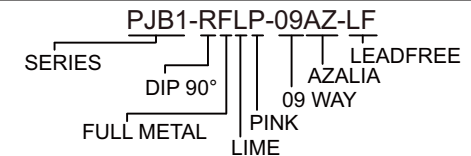

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 3.5mm EARPHONE JACK AZALIA TYPE 9 PIN DIP