

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
50 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:
300 V AC
5. 绝缘阻抗:Insulation Resistance:
100MEGA ohms MIN

原材料:Raw material:


1. 塑胶:Plastic cement:
Hing Temperature Thermoplastics,
LCP Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: SPCC

电镀:Electroplate:


1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

RoHS Compliant


TOLERANCES ARE

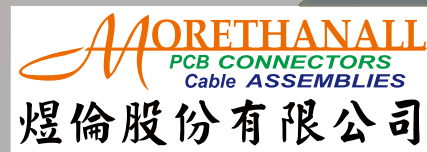

DRAWING BY CY		X ± 0.30
CHECKED BY GENIUS		.X ± 0.25
UNIT / mm	SCALE 1 : 1	.XX ± 0.20
DATE		.XXX ± 0.10
		ANG ± 5°



ORDER INFORMATION



www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: MINI USB 5PM B型 前五后四三件套