

Features:


- 2 ~ 12 circuits available
- PBT + GF
- Tin-plated brass pin
- .025"(0.64mm) square pin
- Standard color: Black

2P

3P


4P

odd: 5 ~ 11P even: 6 ~ 12P

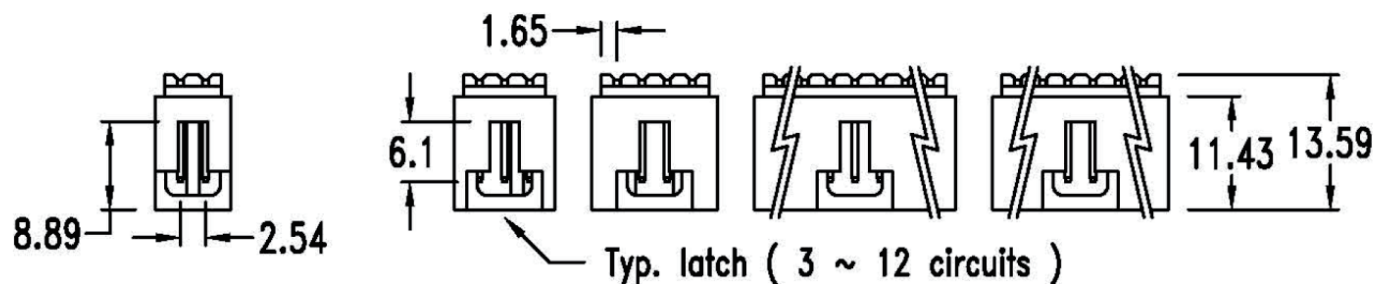


Specification:

- Current rating: 3A
- Voltage rating: 250V
- Contact resistance: 15mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(including temperature rise)

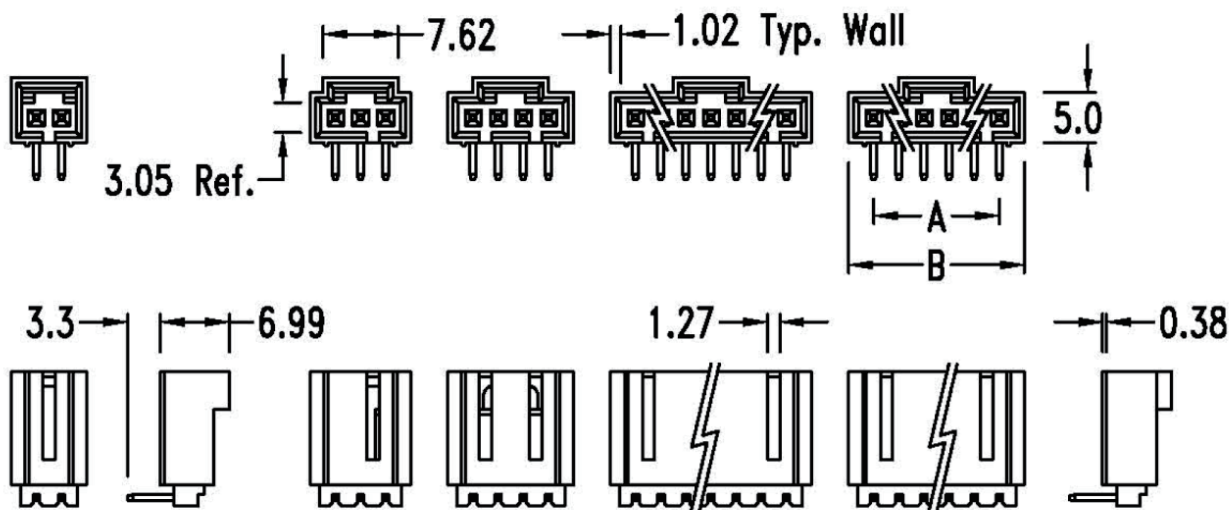

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.54	7.62	5	10.16	15.24	8	17.78	22.86	11	25.40	30.48
3	5.08	10.16	6	12.70	17.78	9	20.32	25.40	12	27.94	33.02
4	7.62	12.70	7	15.24	20.32	10	22.86	27.94			

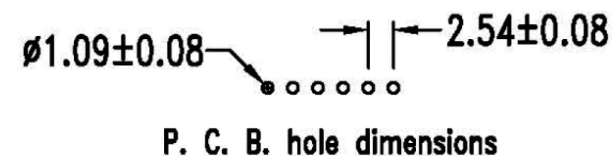

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1

DATE

SIZE A4 PPROJECTION

TOLERANCES ARE


X. ±

.X ±

.XX ±

.XXX ±

ANG ±



ORDER INFORMATION

MCG-R-1Xxx-LF

SERIES | 1X02:02WAY LEADFREE | 1X12:12WAY

DIP 90°

DESCRIPTION: