

NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	HOUSING	P.B.T. G.F.	WHITE		1
2	PIN TERM.	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	Cold:1~3 μ '' NI:40~60 μ '' TIN:120 μ '' (100% pure Tin of lead free plating)	4
3	SHELL	BRASS T:0.3	NICKEL PLATED	NI:2~3u	1

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.


Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage:750V AC (rms) for 1 Minute(Rev. 1.1)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

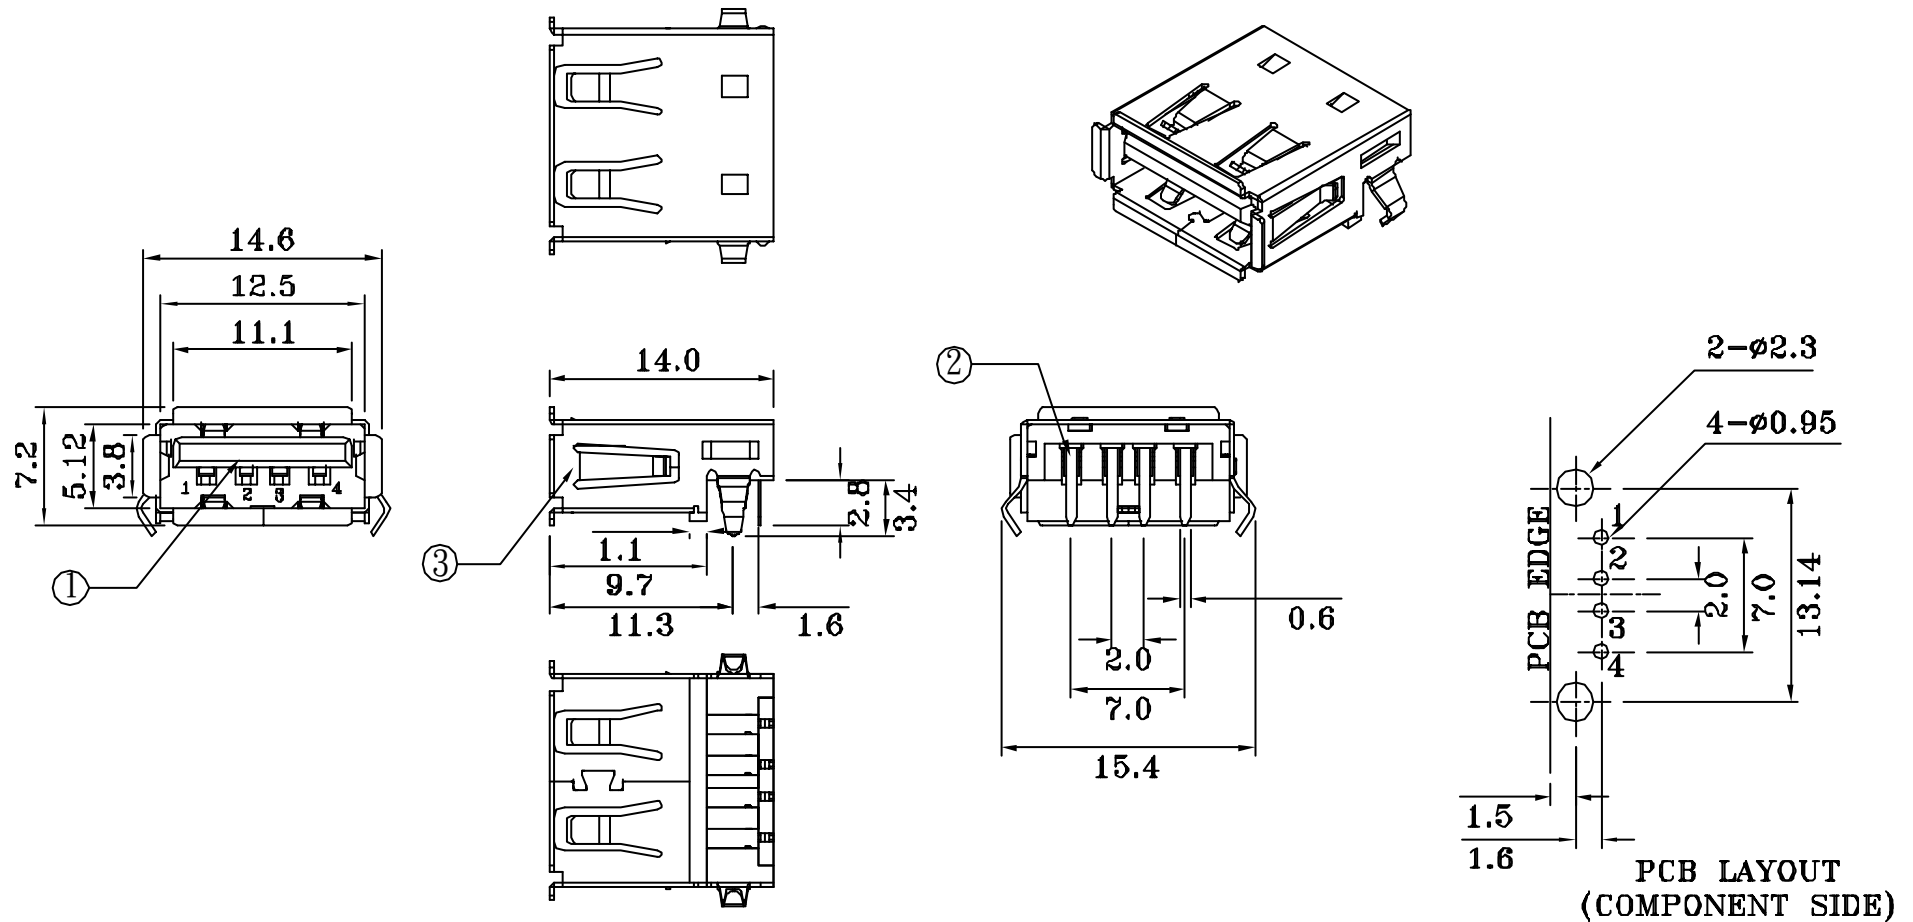

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±
.X ± 0.20

CHECKED BY GENIUS

.XX ± 0.10

UNIT / mm


SCALE 1 : 1

.XXX ±
ANG ±

DATE

SIZE A4

P PROJECTION



ORDER INFORMATION

USB-SRFWH-4A-LF

SERIES | | | LEADFREE
FEMALE | | | 4 PIN A TYPE
OFFSET
DIP 90°

DESCRIPTION: USB. TYPE A FLAT 90° DIP

煜倫股份有限公司

www.morethanall.com