

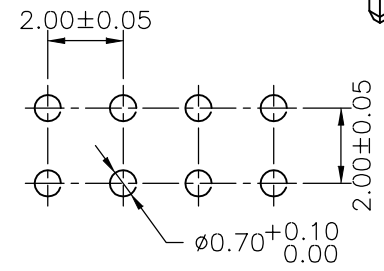


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

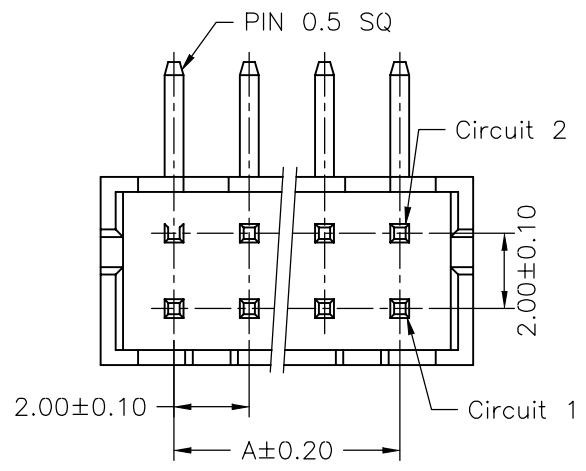


P.C.B LAYOUT

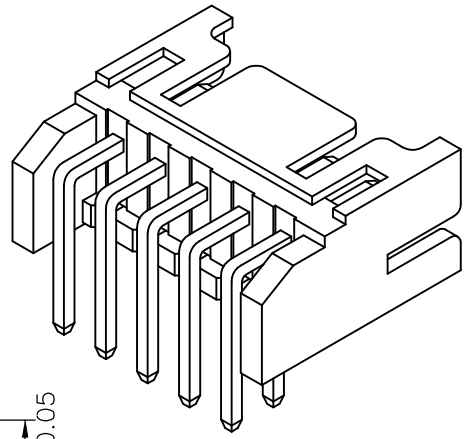

SPECIFICATIONS
 Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 800V AC/minute
 Pin Material: Bass/Tin-plated
 Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
PHD-R-04	2.00	6.00
PHD-R-06	4.00	8.00
PHD-R-08	6.00	10.00
PHD-R-10	8.00	12.00
PHD-R-12	10.00	14.00
PHD-R-14	12.00	16.00
PHD-R-16	14.00	18.00
PHD-R-18	16.00	20.00
PHD-R-20	18.00	22.00
PHD-R-22	20.00	24.00
PHD-R-24	22.00	26.00
PHD-R-26	24.00	28.00
PHD-R-28	26.00	30.00
PHD-R-30	28.00	32.00
PHD-R-32	30.00	34.00
PHD-R-34	32.00	36.00
PHD-R-36	34.00	38.00
PHD-R-38	36.00	40.00
PHD-R-40	38.00	42.00

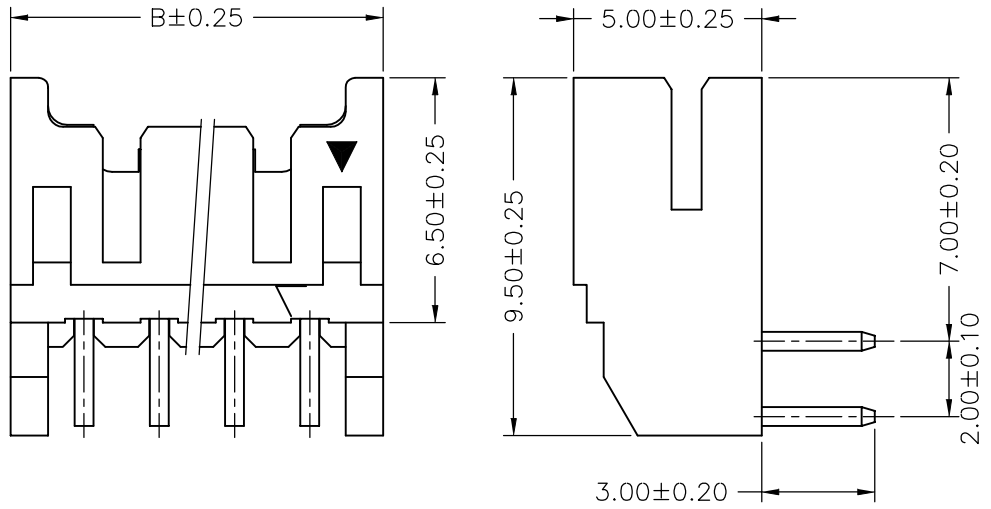

PART NO. PHD-R-xx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: 2.00mm PITCH 90° WAFER		
DWG NO. PHD-R-xx					DRAWING BY	
FILE NO.		PROJECTION	AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1					

煜倫股份有限公司