


Specifications  
 Current Rating: 2Amp  
 Insulation Resistance: 1000MΩMin.  
 Dielectric Withstanding Voltage: 500VAC  
 Contact Resistance: 20mΩMax.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T(無鹵) or the equivalent material

Recommended P.C.Board Layout  
 (Tolerance: ±0.05)

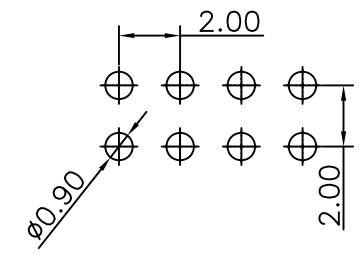

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X. ± 0.30  
 .X ± 0.25  
 .XX ± 0.15  
 .XXX ± 0.10  
 ANG ±



ORDER INFORMATION

SK-D40-2Xxx-LF  
 SERIES | LEADFREE  
 2X03:06WAY  
 2X40:80WAY  
 HIGH 4.0mm  
 DIP 180°

DESCRIPTION: 2.0 FEMALE HEADER DUAL ROWS DIP TYPE BASE 4.0H