


Press Fit Type

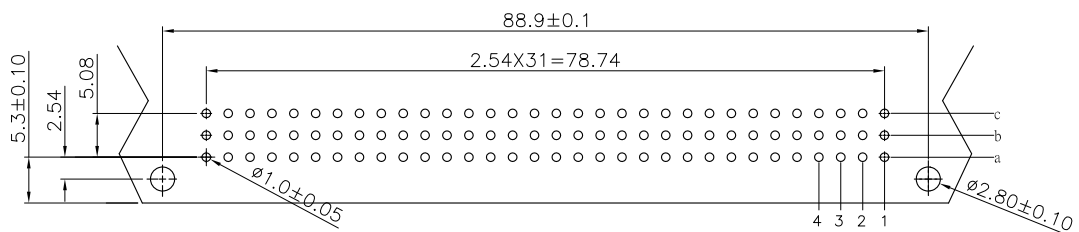

P.C. Board Layout

**Material:**

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Lock: Phosphor Bronze.

**Electrical Characteristics:**

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C~+105°C .

**\*RoHS Compliant**

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	96	a b c	
	64	a - c	
	32	a - -	
5.08mm	48	a b c	
	32	a - c	
	16	a - -	

**RoHS Compliant**

TOLERANCES ARE



DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1


.XXX ±

DATE

ANG ±

SIZE A4

P PROJECTION



**ORDER INFORMATION**

UC-SQ-3X32-LF  
 SERIES | LEADFREE  
 96 WAY  
 90° PRESS FIT  
 FEMALE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com