


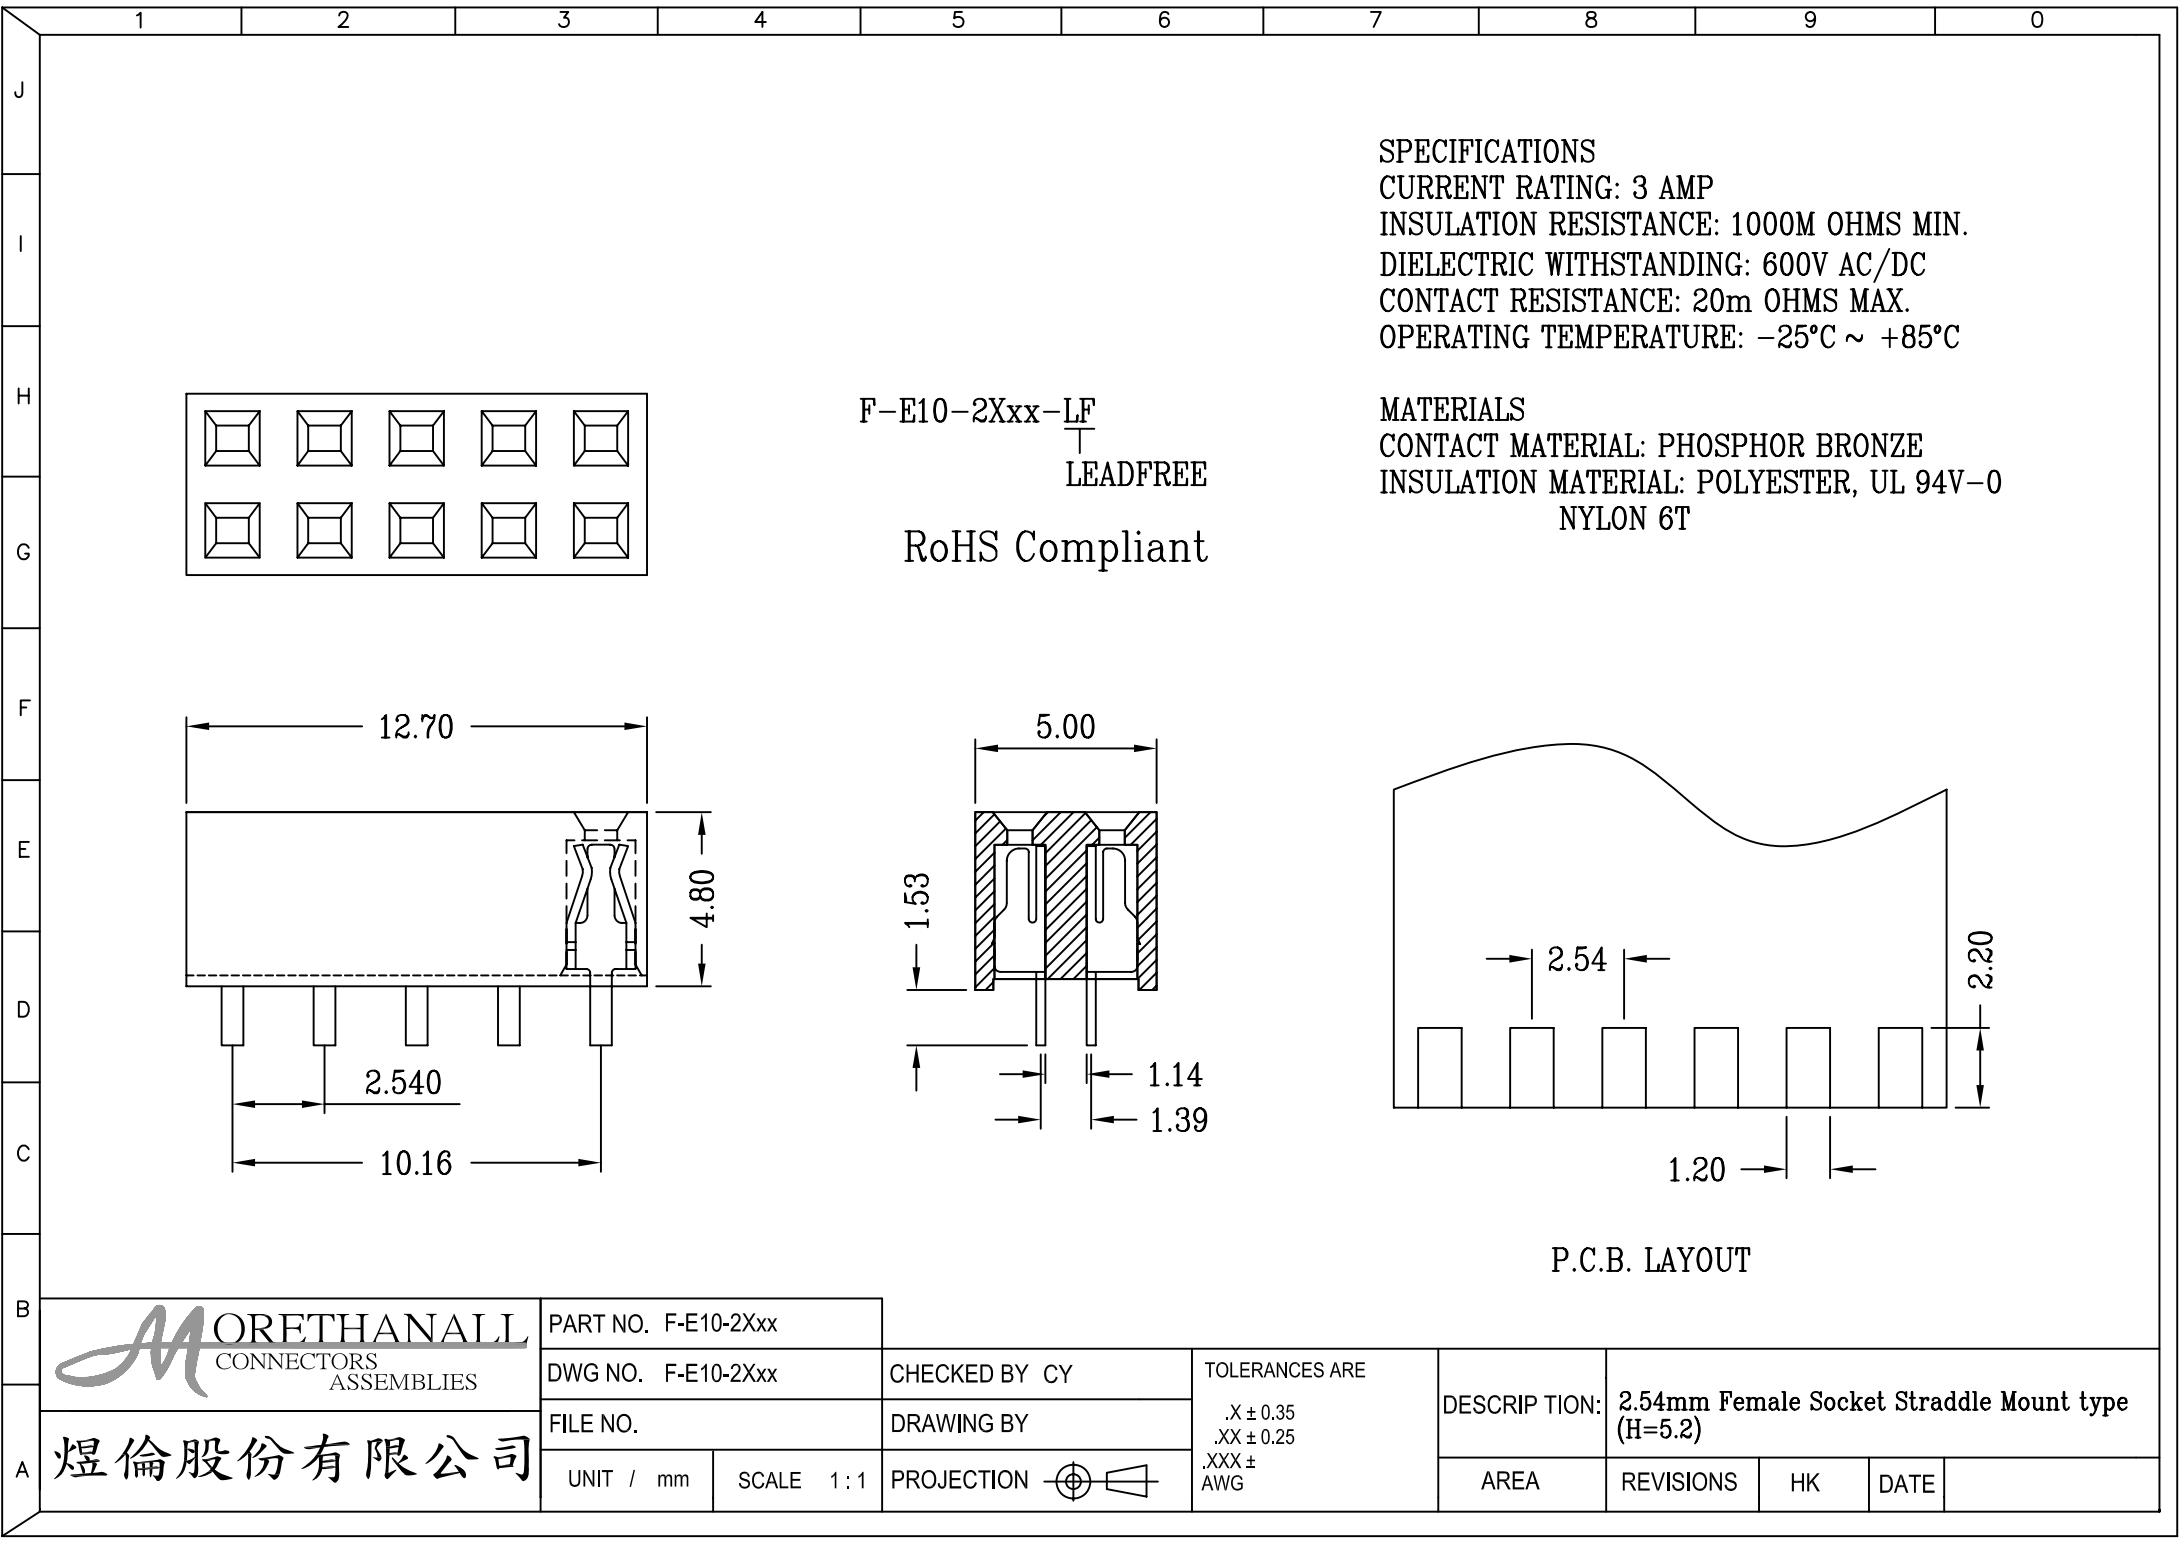

SPECIFICATIONS

CURRENT RATING: 3 AMP
INSULATION RESISTANCE: 1000M OHMS MIN.
DIELECTRIC WITHSTANDING: 600V AC/DC
CONTACT RESISTANCE: 20m OHMS MAX.
OPERATING TEMPERATURE: -25°C ~ +85°C

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE
INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

F-E10-2Xxx-LF
LEADFREE
RoHS Compliant

P.C.B. LAYOUT



煜倫股份有限公司

PART NO. F-E10-2Xxx								
DWG NO. F-E10-2Xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.35 .XX ± 0.25 .XXX ± AWG	DESCRIP TION:	2.54mm Female Socket Straddle Mount type (H=5.2)			
FILE NO.		DRAWING BY						
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE	