

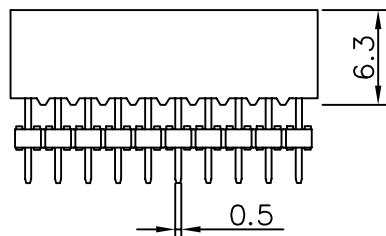


No. of Contacts	DIMENSIONS	
	A	B
12	10.00	12.40
14	12.00	14.40
16	14.00	16.40
18	16.00	18.40
20	18.00	20.40
22	20.00	22.40
24	22.00	24.40
26	24.00	26.40
28	26.00	28.40
30	28.00	30.40
32	30.00	32.40
34	32.00	34.40
36	34.00	36.40
38	36.00	38.40
40	38.00	40.40
42	40.00	42.40
44	42.00	44.40
46	44.00	46.40
48	46.00	48.40
50	48.00	50.40
52	50.00	52.40
54	52.00	54.40
56	54.00	56.40
58	56.00	58.40
60	58.00	60.40

SE-D09323-2Xxx-LF
LEADFREE

RoHS Compliant

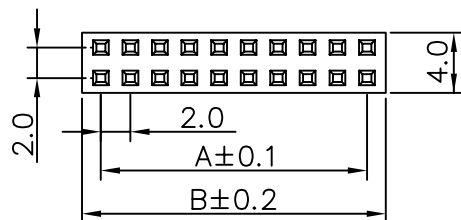

SPECIFICATIONS


Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper Alloy
 Insulator Material: High Temperature plastic,UL 94V-0

Finish: Tin,Gold or Duplex plated

◎ Standard: Duplex plated

◎ Note:

Duplex plating: gold plated on contact area, Tin on solder area



Recommended PCB Layout
(PCB TOLERANCE ±0.05)



PART NO. SE-D09323-4Xxx

DWG NO. SE-D09323-4Xxx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ±0.2
.XX ±
XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司