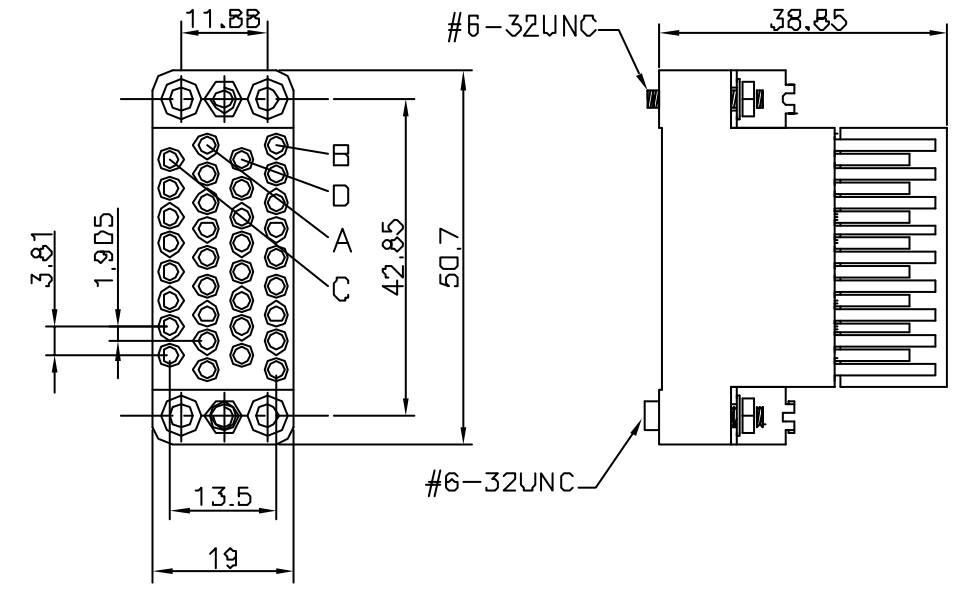

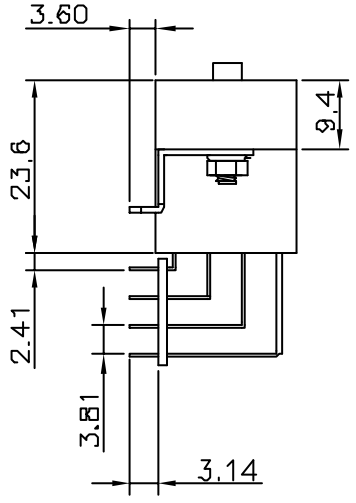

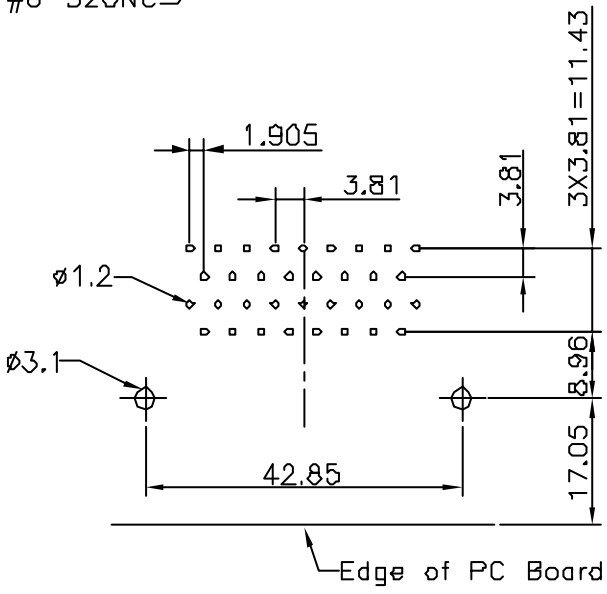

PCB LAYOUT

MECHANICAL

INSULATOR MATERIAL:
PBT & Glass-fibre reinforced
UL-94-V0

CONTACT:
Phosphor bronze

ELECTRICAL

CURRENT RATING:
7 Amp

WITHSTANDING VOLTAGE:
AC 1200V Min. (for one minute)

INSULATION RESISTANCE:
1000MΩ Min.(at 500V DC)

CONTACT RESISTANCE:
10mΩ Max. mated

WORKING TEMPERATURE:
-55°C to +105°C

MORETHANALL CONNECTORS ASSEMBLIES

煜倫有限公司

PART NO. V35-SRL-34			TOLERANCES ARE	DESCRIP TION:	V.35 PCB RIGHT ANGLE FEMALE HIGH PROFILE
DWG NO. V35-SRL-34	CHECKED BY CY		.X ± 0.2		
FILE NO.	DRAWING BY		.XX ± 0.15		
UNIT / mm	SCALE 1:1	PROJECTION	.XXX ± AWG	AREA	REVISIONS / HK / DATE