

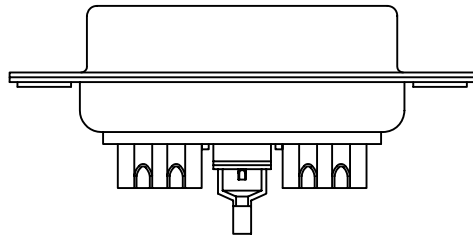



1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

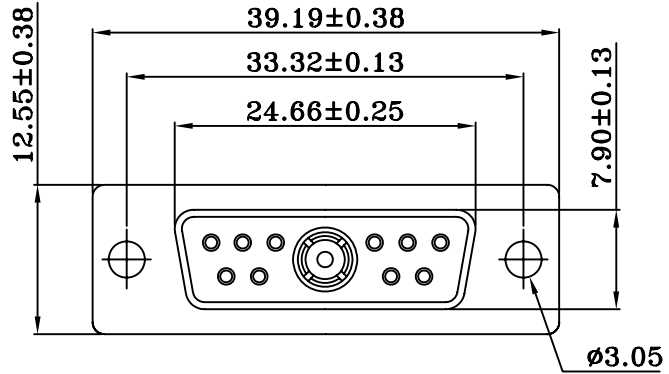

PCB LAYOUT

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
 CONNECTOR INSULATOR : PBT THERMOPLASTIC,
 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
 COAXIAL INSULATOR : TEFLON UL 94V-0 WHITE COLOR
 SIGNAL CONTACT MATERIAL: BRASS, FULL GOLD FLASH
 COAXIAL CONTACT MATERIAL: BRASS, 15u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING : 3.0 AMPS
 SIGNAL CONTACT RESISTANCE : 10 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE :
 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +125°C
 COAXIAL CONTACT IMPEDANCE: 75 OHMS



PART NO. DXS-S75-11W1

DWG NO. DXS-S75-11W1

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

D-SUB CONNECTOR
 (Coaxial Contact Solder Type)

AREA

REVISIONS

HK

DATE

煜倫股份有限公司