

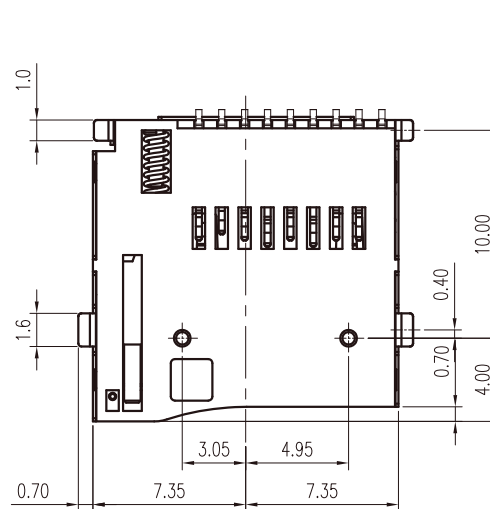
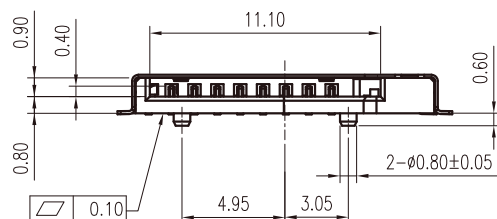
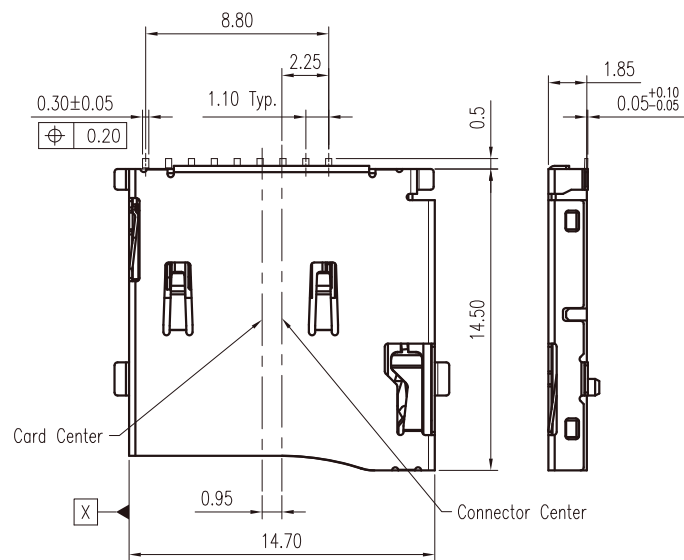


Card Detection Switch	
When Card is Ejected	When Card is Inserted
Open  Cd G	Close  Cd G

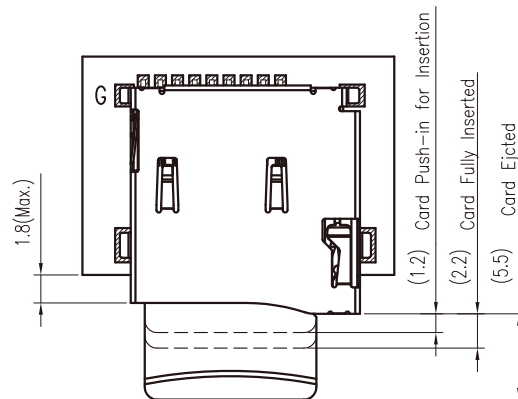

1. Material :
Housing : Thermoplastic UL 94V-0, Black
Terminal : Copper Alloy
Shell : SUS304R-3/4H
Drag Link : SUS304
Spring : Piano Wire
2. Finished :
Terminal : G/F Overall

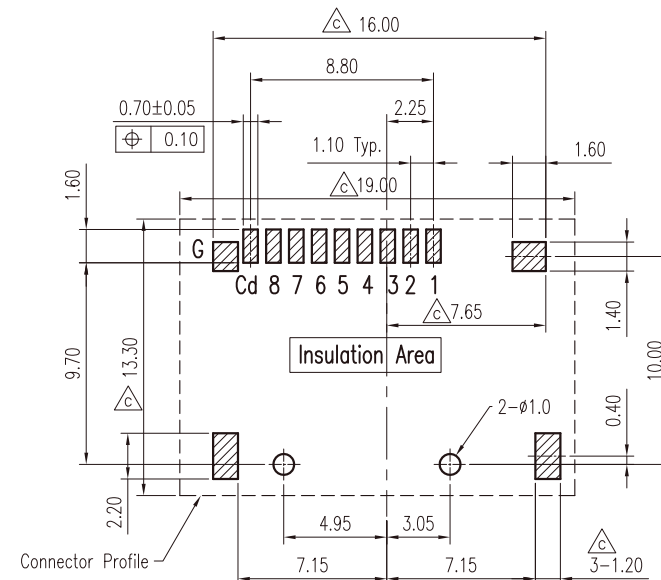

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm


MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

SIZE A4

114



SERIES 90°SMT POST 8.0mm BOTTOM CONTACT PUSH PUSH 08WAY LEADFREE

DESCRIPTION: Micor SD T-Flash Memory Card Conn.