

FEATURES:



- Half pitch 1.27mm(.050") series
- Ribbon type right angle dip mount connector
- Bracket with latch block and without latch block
- Steel body provide EMI/RFI shielded

MATERIALS:

- Housing and cover: Plastic thermoplastic P.B.T UL94V-0
- Contact: Phosphor bronze gold selective plated over Tin
- Shell: Steel, Nickel or tin plated over copper
- Bracket: Steel, Nickel plated over copper
- Boardlock: Phosphor Bronze Tin plated over copper

ELECTRICAL:

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -55°C ~ +105°C

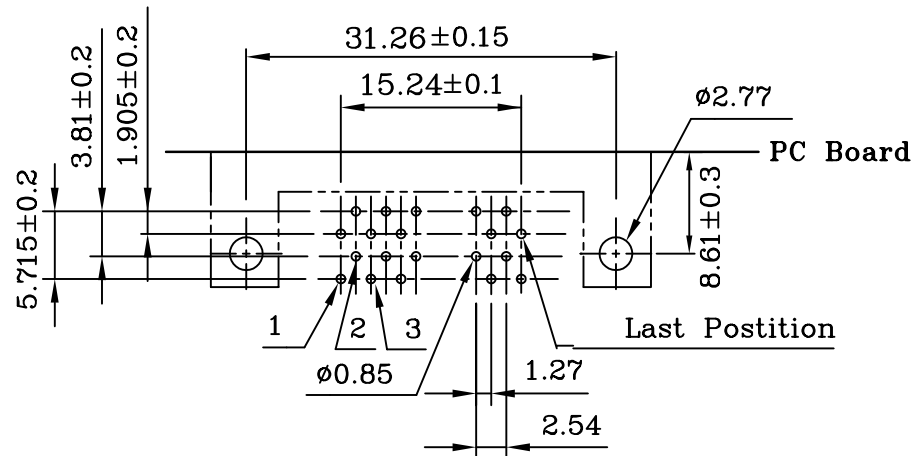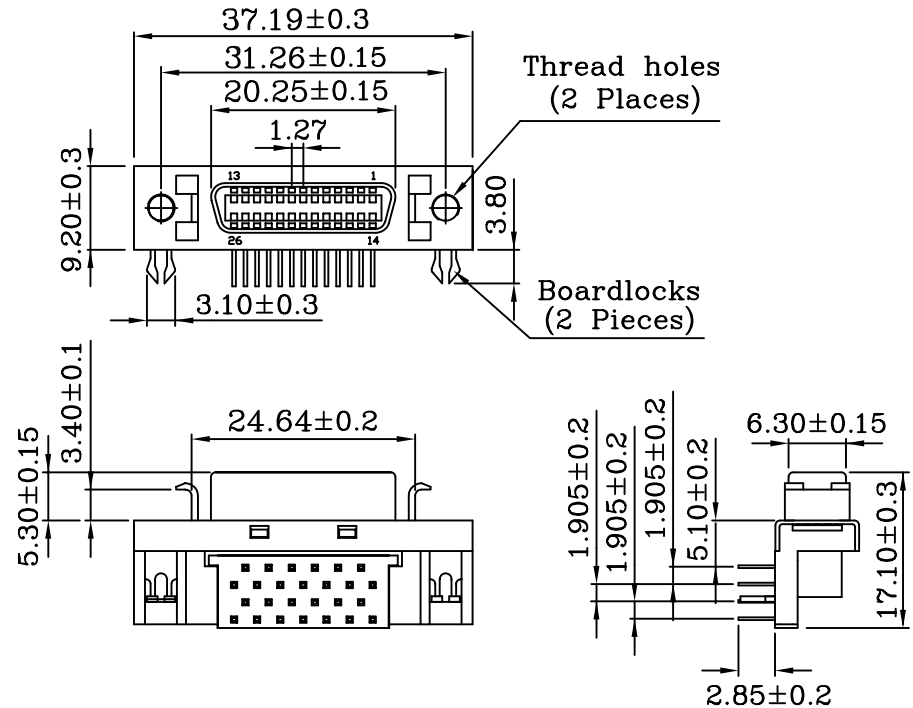

PC Board Mounting Dimensions



PART NO. **HPC-SRL-026**

DWG NO. **HPC-SRL-026**

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

1.27mm(.050") Pitch Centronic 26P Female Connector Right angle Dip mount Type

FILE NO.

DRAWING BY

.X ± 0.2
.XX ±
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION