



Electric Specifications
 Current Rating:3.0Amps
 Rating Voltage: 250V AC
 Insulation Resistance:100M Ohm Min At DC 500V
 Contact Resistance:30m Ohm Max At DC 100m Amps
 Withstanding Voltage:1 Minute At 750V r.m.s Min
 Temperature Range:-40°C~85°C
 Materials:
 Insulator:PBT (UL 94V-0)
 Insulator Color:Gray
 Terminal :Phosphor Bronze
 Plating:Tin Plated

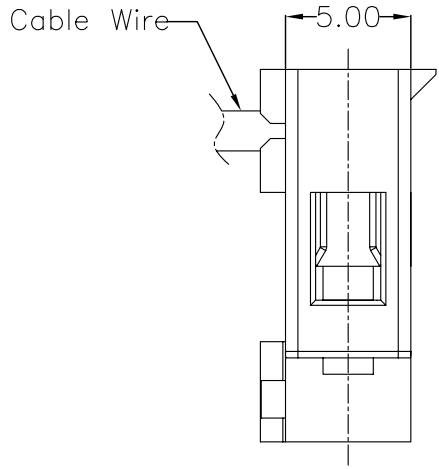

MKF-C2-xx-LF
 LEADFREE
 RoHS Compliant

Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B
2	7.40	2.50	12	32.40	27.50
3	9.90	5.00	13	34.90	30.00
4	12.40	7.50	14	37.40	32.50
5	14.90	10.00	15	39.90	35.00
6	17.40	12.50	16	42.40	37.50
7	19.90	15.00	17	44.90	40.00
8	22.40	17.50	18	47.40	42.50
9	24.90	20.00	19	49.90	45.00
10	27.40	22.50	20	49.90	47.50
11	29.90	25.00			

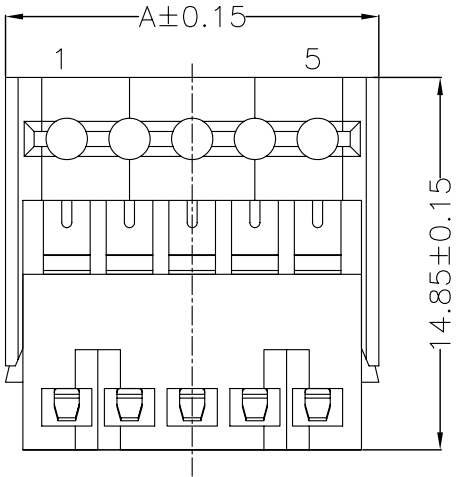

PART NO. MKF-C2-xx

DWG NO. MKF-C2-xx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION: 2.50mm Flat IDC Connector

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA	REVISIONS	HK	DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION