
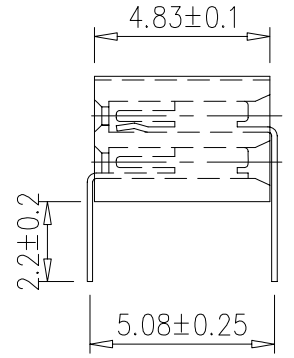


Recommended  
P.C. Board Hole Layout

**Specifications**  
 Current Rating : 1 Amps  
 Insulator Resistance : 1000 Megohms min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding : AC 500V  
 Operating Temperature : -40°C ~ +105°C  
 Contact Material : Phosphor Bronze  
 Insulator Material : Polyester, UL 94V-0  
 Standard : Nylon-6T  
 Contact Plated : Full Gold, Full Tin, Selective Plated

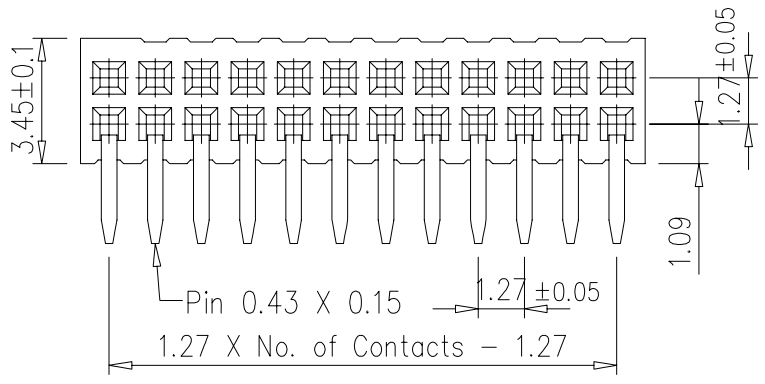

YA-S-2Xxx-LF  
LEADFREE

RoHS Compliant



PART NO. YA-S-2Xxx DWG NO. YA-S-2Xxx FILE NO.	CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: Female Header P1.27X1.27mm Profile : 3.45mm, Dua Rows, Straight Type	
	UNIT / mm SCALE 1 : 1	DRAWING BY			PROJECTION
焜倫股份有限公司		AREA	REVISIONS	HK	DATE