

Specifications


Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0

注：此塑膠用於SMT型態的26~50PIN塑膠材質用LCP料生產, 02~25PIN塑膠材質用PA6T料生產。

Recommended P.C.Board Layout



RoHS Compliant



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 ANG ±

PJECTION



ORDER INFORMATION

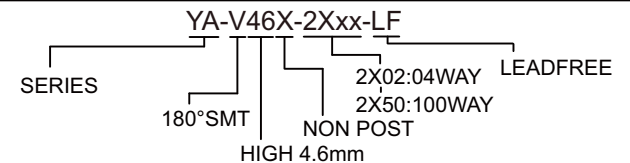

DESCRIPTION: 1.27 FEMALE HEADER DUAL ROWS SMT TYPE BASE 4.40H