

NOTES

1.MATERIAL

1.1 Insulator:PBT+15% G.F. UL-94V-0

2.SPECIFICATION

2.1 Current Rating: 3Amp

2.2 Dielectric Withstading : AC 500V/min.R.M.S.

2.3 Insulator Resistance: 1000M ohms Min

2.4 Contact Resistance: 20 M ohms Min

2.5 Operation Temperature: -55 °C to +85 °C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE


SIZE A4

X. ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

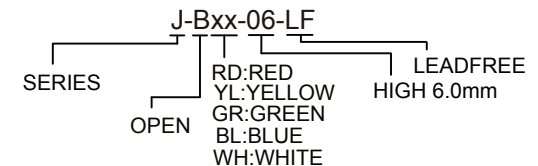

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: