

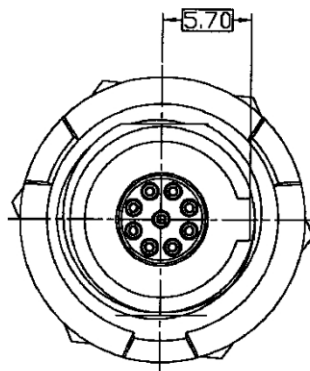
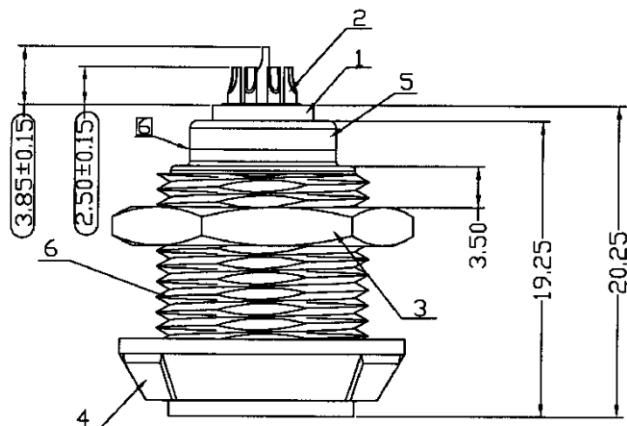


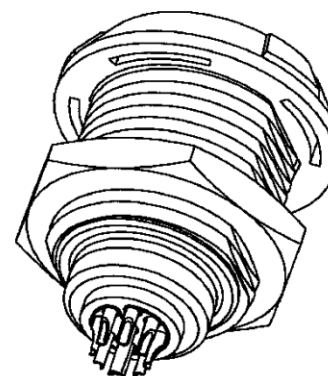

# DESCRIPTION

|     |                           |
|-----|---------------------------|
| 6   | RECEPTACLE HOUSING A TYPE |
| 5   | RECEPTACLE COVER          |
| 4   | FRONT NUT                 |
| 3   | HEX NUT                   |
| 2   | CONTACT                   |
| 1   | INSERT                    |
| NO. | PART NAME                 |

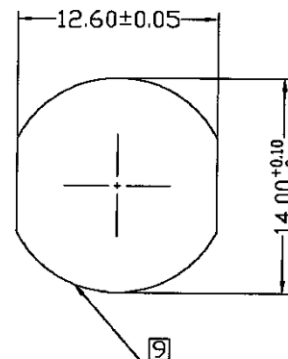

3D 參考圖

## 備注 : (Remark)

1.材質: 外殼: PSU  
(Material: Shell : PSU)  
絕緣體: PEEK  
(Insert: PEEK)  
端子: 磷青銅  
(Contacts: Phosphor Bronze)  
線夾: PSU  
(Cable collect: PSU)  
螺帽: PSU  
(Back Nut: PSU)  
金屬螺母: 黃銅  
(Nut: Brass)

2.所有的尺寸都以毫米為單位  
(Dimensions in "mm")

3.符合ROHS  
(RoHS compliant)

4.以Q做標識的尺寸需經QC制程管制  
(QC control item "Q")

5.芯數: 02.04.05.06.07.08.09.10.14芯  
(available pin- 2, 4, 5, 6, 7, 8, 9, 10, 14)

Q6.超音波焊接處的破壞力最小是10kg  
(Ultrasonic welding solder force: 10kg min.)

Q7.螺母的扭力是1.5Nm  
(screw torque: 1.5Nm)

Q8.(與公端成品)插拔力為2kg  
(mating/unmating force: 2kg)

9.安裝孔的尺寸  
(Recommended Panel Cutout)

10.solder temperature: 350±5°C, 2 Seconds

## RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



## ORDER INFORMATION

PP9-SSPA-xx-LF  
SERIES LEADFREE  
02~14WAY  
PANEL FRONT  
SOLDER  
FEMALE

DESCRIPTION: