



Section A-A



Section B-B



Section C-C

## SPECIFICATIONS

### Electrical

Current Rating: 1A AC, DC

Voltage Rating: 125V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 100MΩ/ min.

Dielectric Withstanding Voltage: 250V AC/ min.

Contact Resistance: 20mΩ/ max.

### Material

Terminal material: Phosphor Bronze/ Tin-plated

Wire Range: 28 to 32AWG

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE


SIZE A4

PJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



**ORDER INFORMATION**

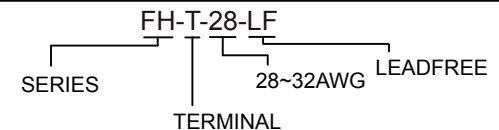

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 1.25mm Terminal