
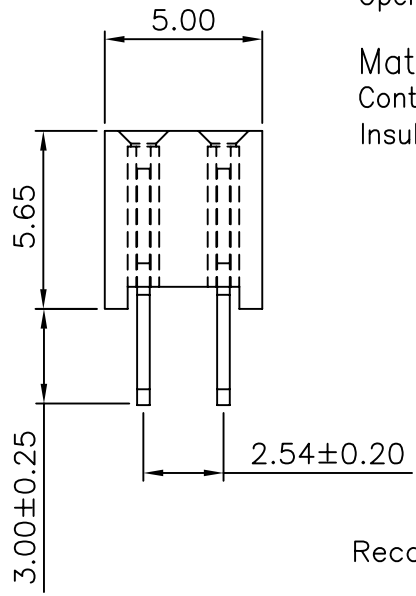
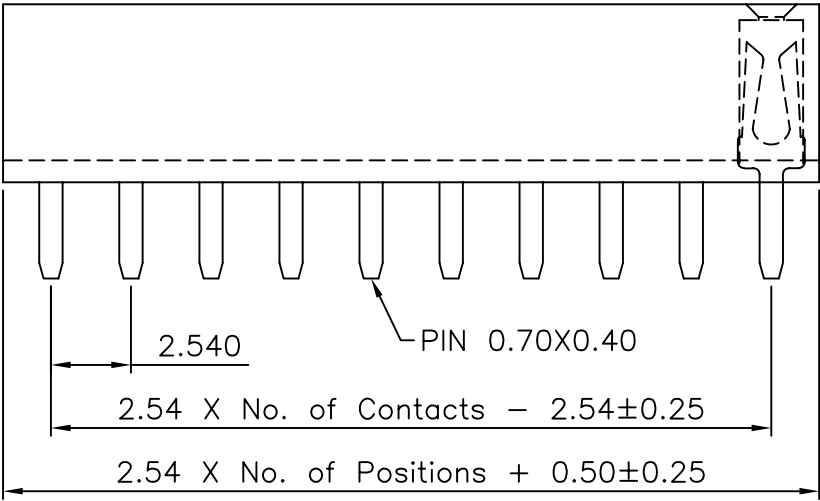


1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

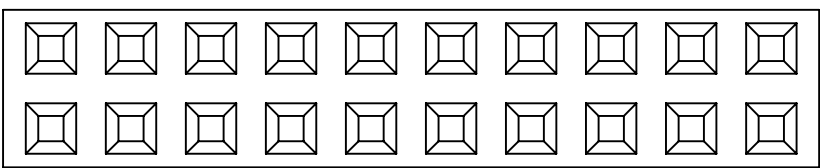

Specifications

Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 P.B.T

F-D57-2Xxx-LF  
 LEADFREE

RoHS Compliant

Recommended P.C.Board  
 Hole Layout

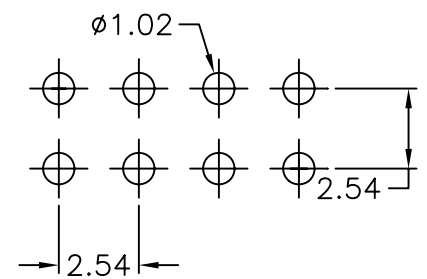

PART NO. F-D57-2Xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.38 .XX ± 0.25 .XXX ± 0.13 AWG	DESCRIP TION: 2.54 FEMALE HEADER DUAL ROWS DIP TYPE BASE 5.65H				
DWG NO. F-D57-2Xxx					DRAWING BY	AREA	REVISIONS	HK
FILE NO.		PROJECTION						
UNIT / mm	SCALE 1:1							

焯倫股份有限公司