


SPECIFICATIONS:

1. CONTACT RESISTANCE : 20m OHM MAX.
2. INSULATION RESISTANCE : 100M OHM AT 500V D.C.
3. VOLTAGE WITHSTANDING : AC 500V 1 MINUTE ,
4. INSERTION FORCE : 5.0KG MAX.
5. WITHDRAWAL FORCE : 1-3.5 KG
6. LIFE TEST : 5,000 CYCLES MIN. AFTER TESTING, CONTACT RESISTANCE SHALL NOT EXCEED 100m OHM .
7. CURRENT RATING : AC: 100V 2A
DC: 24V 1A

DJ-S5-03-LF
LEADFREE
RoHS Compliant

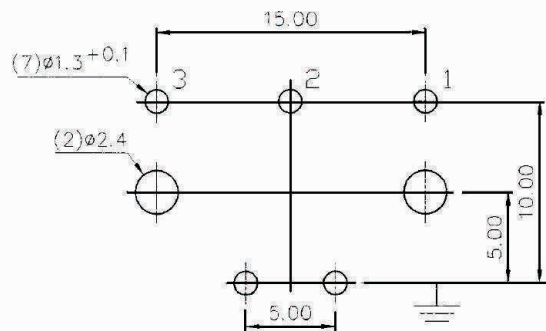

MOUNTING HOLE
(TOP VIEW)

4.	CONTACTOR	3	BSR-H/2 0.7t	TIN	
3.	PLATE	1	BAKELITE	PL-PEM 1.4t	
2.	EARTH TERMINAL	1	PBSR-H 0.2t	TIN	
1.	BODY	1	P.B.T.		UL94V-0
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE


SIZE A4

X.±
.X±0.20
.XX±
.XXX±
ANG±

PPOJECTION



ORDER INFORMATION

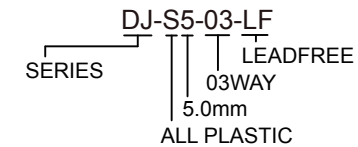

DESCRIPTION: