

**Material:**

1. Insulator: PBT+30% Glass Fiber(Meet UL94V-0).
2. Contact: Copper Alloy.
3. Contact Plated: Selective Gold over Nickel Plated.
4. Shell: Steel with Nickel or Tin or Zinc Plated.

**Specification:**

1. Current Rating: 5 Amps.
2. Withstanding Voltage: AC 500V for 1 Minute.
3. Insulation Resistance: 1000MΩ Min. at DC 500V.
4. Contact Resistance: 15mΩ Max..
5. Operating Temperature: -40°C~+105°C.

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D
DR-PGNJ-09	16.92	24.99	30.81	11.08
DR-PGNJ-15	25.25	33.32	39.14	19.39
DR-PGNJ-25	38.96	47.04	53.04	33.24
DR-PGNJ-37	55.42	63.50	69.32	49.86

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE


SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.15  
.XXX ±  
ANG ±


P PROJECTION

煜倫股份有限公司

www.morethanall.com



**ORDER INFORMATION**

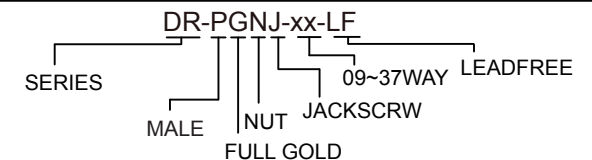

DESCRIPTION: D-SUB RIGHT ANGLE MALE CONNECTOR 8.08mm WITH RIVET TYPE