


NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL RADIUS ARE 0.5 MM.
2. MATERIAL: NYLON 6T, 30% GLASS FIBER FILLED, UL94V-0 RATED, NATURAL COLOR.
3. BURR: 0.08mm (MAX.)
4. WARPAGE: 0.25mm (MAX.)
5. PART SHOULD BE FREE OF VOIDS, SINKS, AND SHORTS.
6. LOGO, MARKING, AND CAVITY NO. SHOULD BE CLEAR, AND THEIR HEIGHT SHOULD BE LOWER THAN THE SURFACE.
7. All materials must be GP materials

Recommended P.C.Board Layout

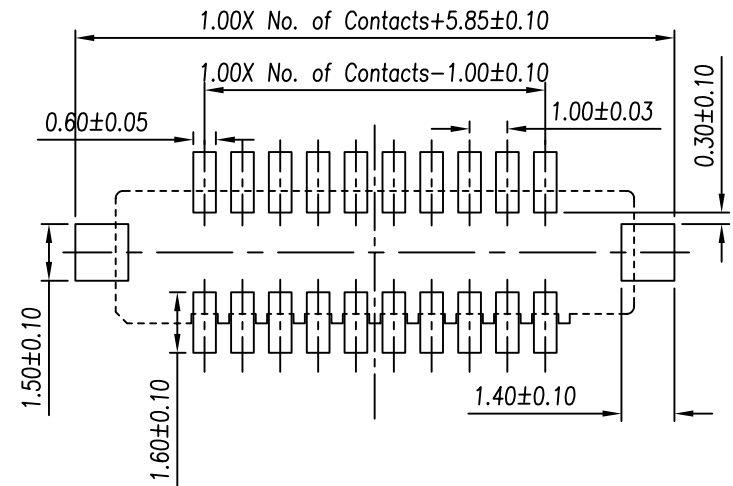

No. of Pins per Row
05-15

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. NP1014-SV-xx

DWG NO. NP1014-SV-xx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

.XXX ± 0.13

AWG

DESCRIPTION: 1.00 PITCH FEMALE BOARD TO BOARD SMT TYPE

AREA

REVISIONS

HK

DATE

焯倫股份有限公司