


SPECIFICATIONS


- Current Rating: 1 Amp
- Insulator resistance: 5000 Megohms min.
- Contacts resistance: 20 m ohms max.
- Dielectric withstanding: AC 500 V
- Operating Temperature: -40~+105°C
- Max Processing Temp: 230° for 30 seconds
- Contact Material: Phosphor bronze
- Insulator Material: High Temperature Thermoplastic,UL 94V-0

Finish: Gold plated
 ◎ Standard: Gold flash all over

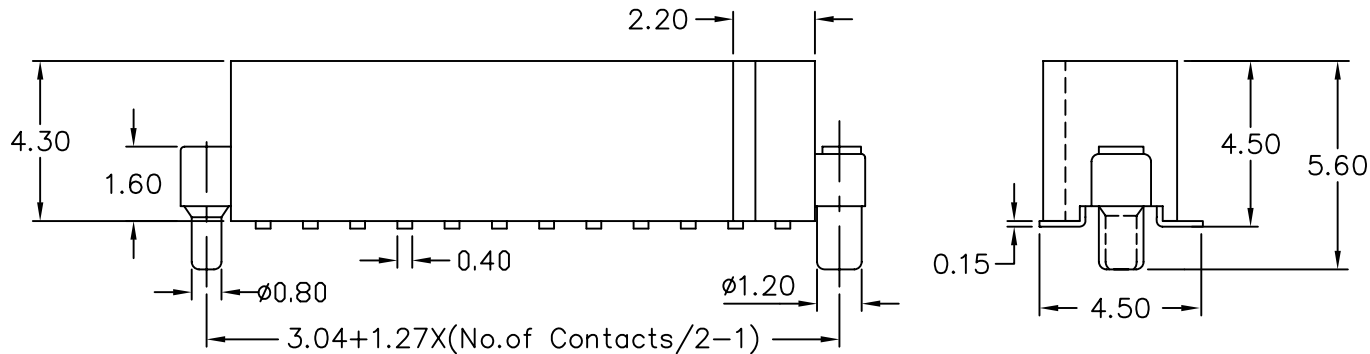

YAB-V45PG10CR-2Xxx-LF
 R: REEL LEADFREE
 C: CAP
 G10: FULL GOLD 10u"

RoHS Compliant

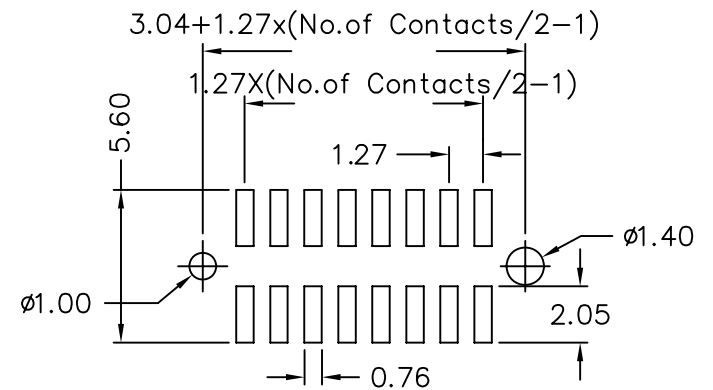

Recommended P.C.Board Layout



PART NO. YAB-V45P-2Xxx

DWG NO. YAB-V45P-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

- .X ±
- .XX ±
- .XXX ±
- AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司