

SPECIFICATIONS

Current Rating: 5A AC, DC
 Voltage Rating: 600V AC,DC
 Operating Temp.: -25°C ~ +85°C
 Insulation Resistance: 1000MΩ/ min.
 Dielectric Withstanding Voltage: 1500V AC/ min.
 Contact Resistance: 10mΩ/ max.





Material

Terminal Material: Brass/Tin-Plated
 Material: Nylon 66, UL94V-0

MFB-PRP-2Xxx-LF
 LEADFREE

RoHS Compliant

PIN	A	B	PIN	A	B
4	4.20	15.50	24	46.20	57.50
6	8.40	19.70			
8	12.60	23.90			
10	16.80	28.10			
12	21.00	32.30			
14	25.20	36.50			
16	29.40	40.70			
18	33.60	44.90			
20	37.80	49.10			
22	42.00	53.30			

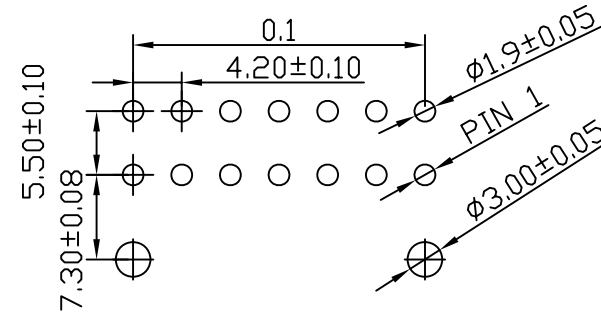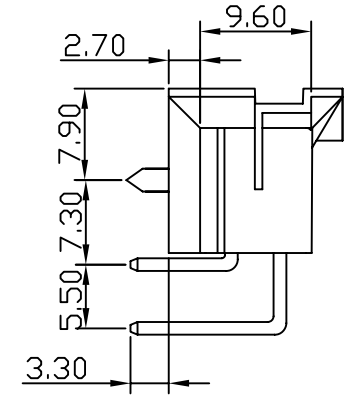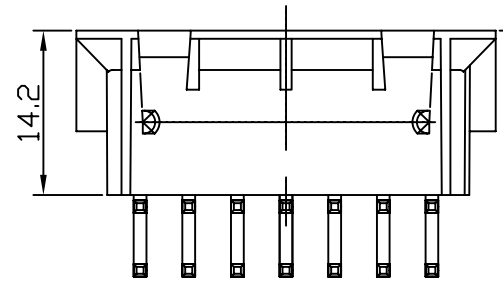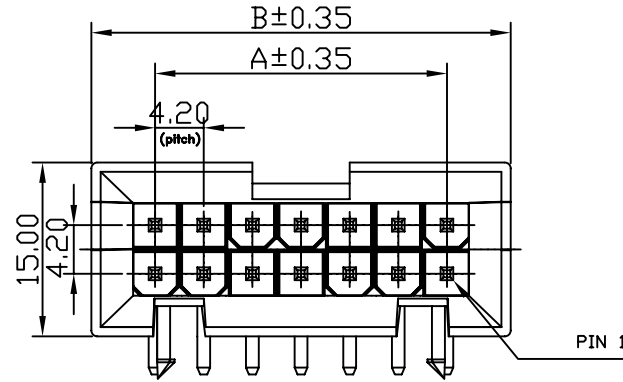

Recommended P.C.B Layout



PART NO. MFB-PRP-2Xxx

DWG NO. MFB-PRP-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
 .X ± 0.35
 .XX ±
 .XXX ±
 AWG

DESCRIP TION:
 AREA

4.2mm Wire-to-Board Header
 DIP 90° Type(BMI)
 REVISIONS
 HK
 DATE

煜倫股份有限公司