


Contact arrangement view from termination side



Ordering Information

NO. OF CONTACTS	15
POSITION	d+z
TERMINATION	PART NUMBER
4.0 mm	UH-SD-15
10.0 mm	UH-SD10-15

CODE NO.	12	16
C =	4.0	10
T =	0.6x1.2	0.6x1.2


Technical data

Housing	PBT & 30%Class Fiber(UL94-0)
Contact	Female : Brass
Operating temperature	-55°C~+105°C
Contact resistance	8m(ohm)max.at DC 100mA
Insulator resistance	1000M(ohm)min.at DC 500V
Current rating	15 AMP
Withstanding voltage	AC 3100V for 1 minute
Insertion force	90N max
Withdrawal force	0.2N/pin min
Contact Rating	Ag ,Plating



煜倫有限公司

PART NO. UH-SD-15		APPROVED BY CY		TOLERANCES ARE .X ± 0.1 .XX ± 0.05 .XXX AWG	DESCRIP TION: DIN 41612 EUROCARD CONNECTORS Vertical Female Type H15 Connectors		
DWG NO. UH-SD-15		DRAWING BY					
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE

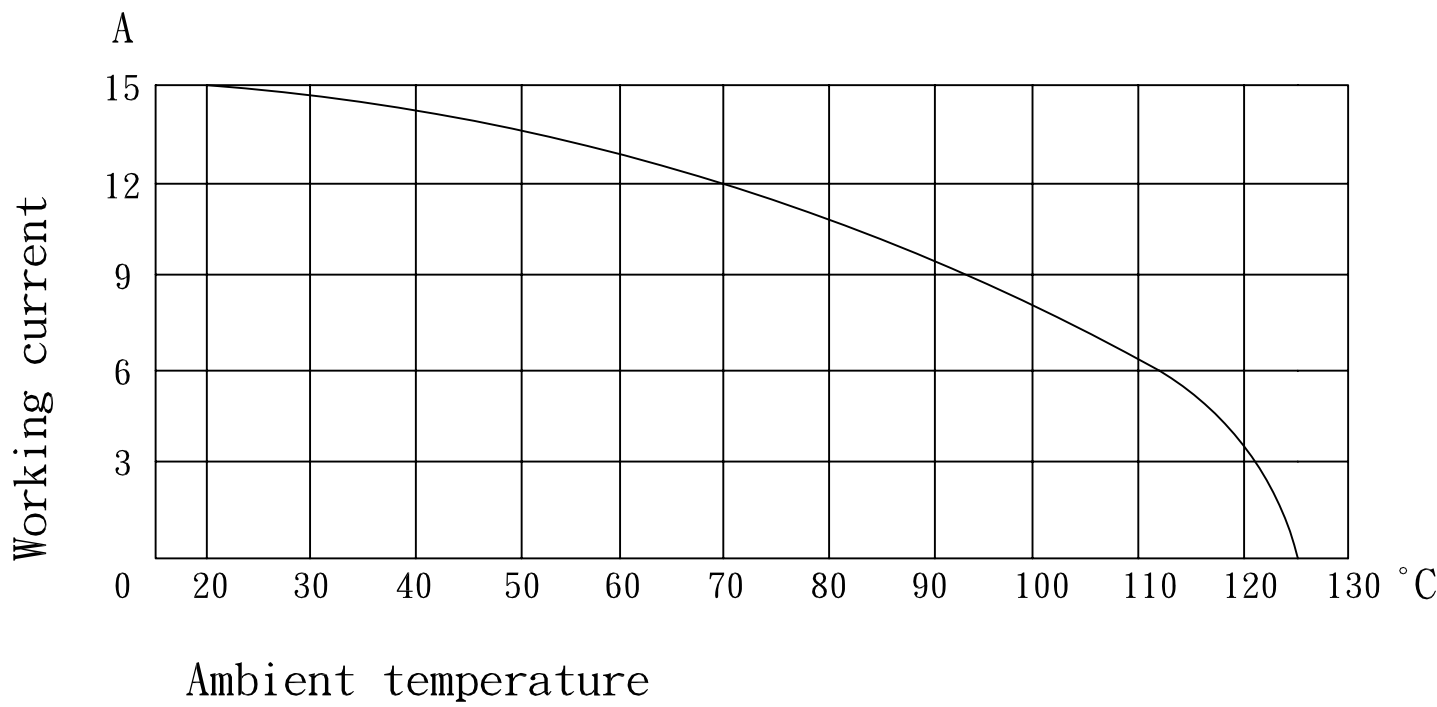

M MORETHANALL
CONNECTORS
ASSEMBLIES

焯倫有限公司

PART NO.

DWG NO.

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.3
.XX ±
.XXX ±
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE