



# SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40° - +105°C
- \* Max Processing Temp: 230° for 30~60 seconds  
(260° for 10 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P (UL 94 V-0)

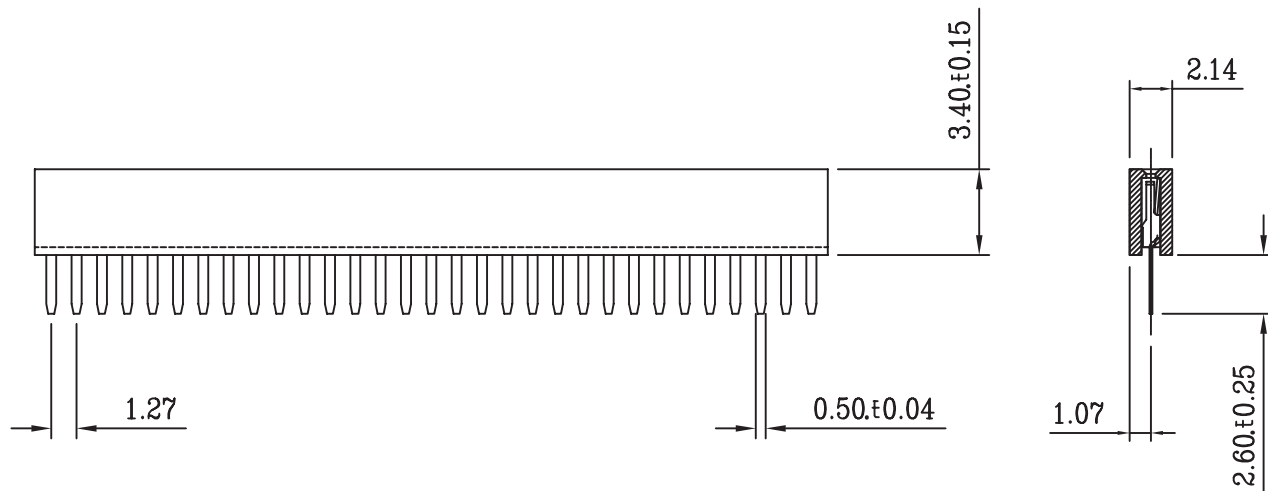

## PCB LAYOUT

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION



### ORDER INFORMATION



煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 1.27mm Dip Socket (Straight/Base:3.4mm)