







PR-P-02





PR-P-03





PR-P-04





PR-P-05





PR-P-06





PR-P-07

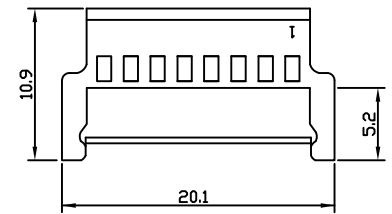


PR-P-08

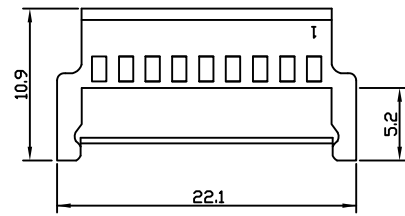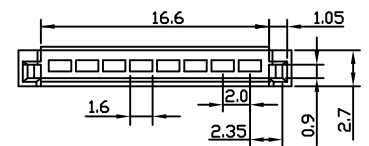

PR-P-09

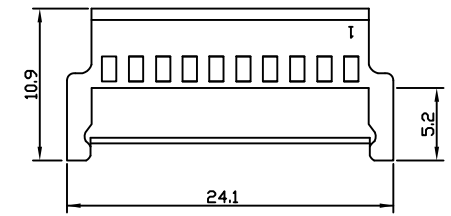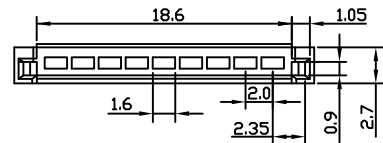

PR-P-10

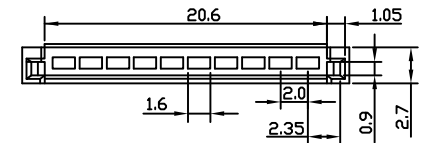

**SPECIFICATIONS**  
 Circuit: 2~10  
 Voltage rating: 125V AC, DC  
 Withstanding voltage: 500V AC/minute  
 Insulation resistance: 1000M OHM min  
 Temperature range: -25°C ~ +85°C  
 Material: UL94V-0 nylon 66

PR-P-xx-LF  
 LEADFREE

**MORE THAN ALL**  
 CONNECTORS  
 ASSEMBLIES

煜倫股份有限公司

PART NO. PR-P-xx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION:			
DWG NO. PR-P-xx		DRAWING BY						
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1							