

T:1.6 Dimensions of PC board holes
Tolerance : ±0.05(Printed-top view)

4	HOUSING	1	PA9T	UL-94V0(BLACK)
3	CONTACT FOOT	1	C5191	t=0.25 Ag PLATED
2	CONTACT FOOT	1	C5191	t=0.25 Ag PLATED
1	PIN FOOT	1	C2680	t=0.20 Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

SCHEMATIC		
DCJ-W24R-10	∅1.0	3
DCJ-W24R-13	∅1.3	1
		2

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.2

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG±

P PROJECTION



ORDER INFORMATION

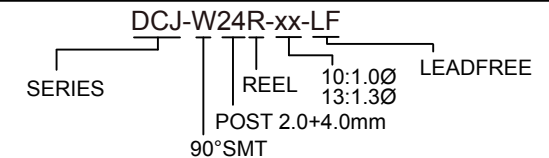

DESCRIPTION: DC POWER JACK

- 1 Space=1 pcs
- 1 Film packing box=1×500pcs
=500pcs
- 1 Big Carton=13×500pcs=6500pcs
- 1 Film packing box Dimension
=L×W×H
=8600×24×6.8
- The thickness of the film=0.4mm
- 1 Embossed Carrier Reel Dimension
=D×H
=330×29.1
- 1 Cover tape Dimension
=L×W×H
=8600×21.3×0.06
- 1 Plastic Bag Dimension
=L×W×D
=1000×1100×0.06
- 1 Big Carto Dimension
=L×W×H
=400×350×340



Unit:mm

Packing temperature request:
105℃~115℃

Net weight:3.5Kg

Total weight:9.0Kg

單位:mm

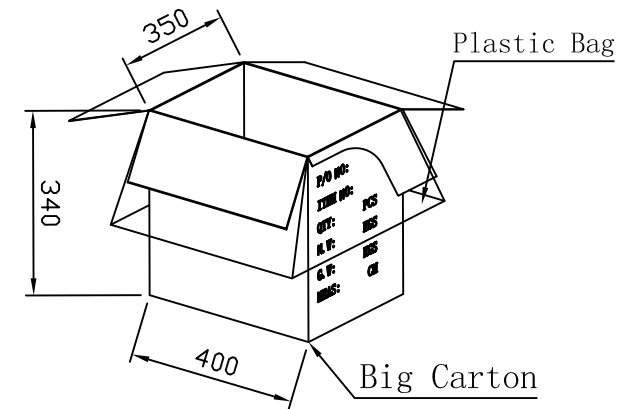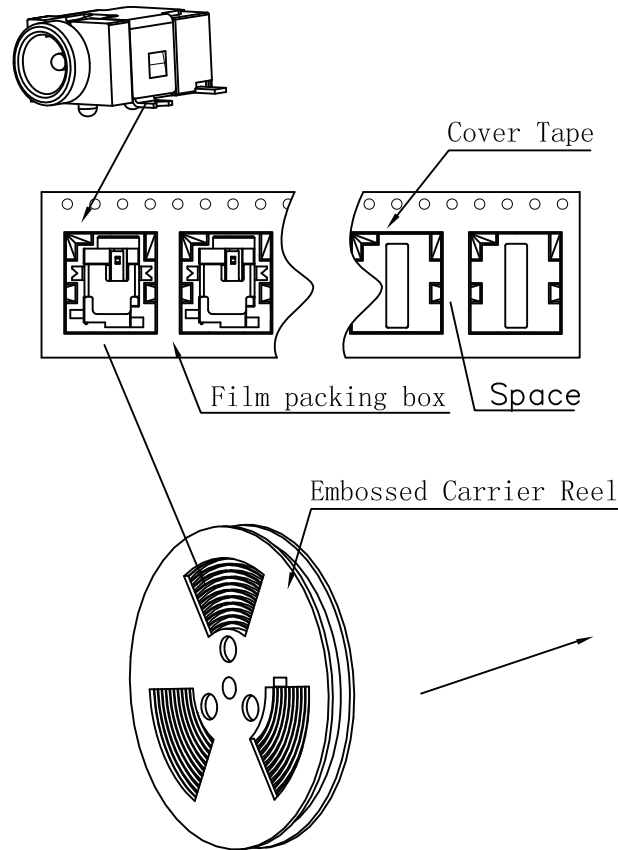

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DCJ-W24R-xx-LF

SERIES REEL 10:1.00 LEADFREE
13:1.30
POST 2.0+4.0mm
90°SMT

DESCRIPTION: