

SPECIFICATIONS


Material

Insulator : PBT glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze or Brass



Electrical

Current Rating : 0.5Amp
 Contact Resistance : 30 m ohms max.
 Insulation Resistance : 1000 M ohms min.
 Dielectric Withstanding Voltage : 250V AC for 1minute
 Operating Temperature : -40° ~ +105°

► Flat ribbon cable with 0.635mm pitch.

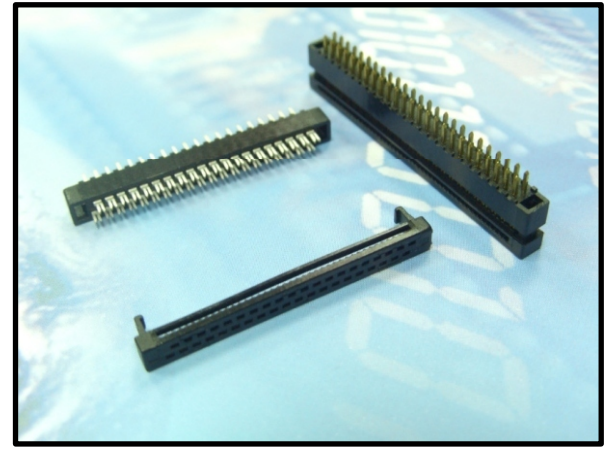

POSITION	A	B
06P	8.01	2.54
08P	9.28	3.81
10P	10.55	5.08
12P	11.82	6.35
14P	13.09	7.62
16P	14.36	8.89
20P	16.90	11.43
22P	18.17	12.70
26P	20.71	15.24
30P	23.25	17.78
34P	25.79	20.32
40P	29.60	24.13
44P	32.14	26.67
50P	35.95	30.48
60P	42.30	36.83
68P	47.38	41.91
80P	55.00	49.53

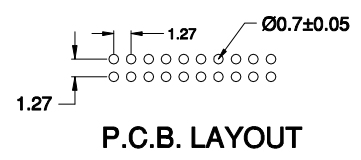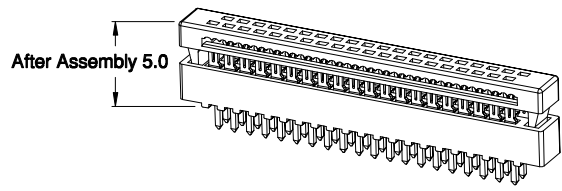

HAP-C2-xxx-LF
 LEADFREE
 006:6/WAY
 }
 080:80/WAY

RoHS Compliant



PART NO. HAP-C2-xxx

DWG NO. HAP-C2-xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION: DIP PLUG 1.27*1.27

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司

UNIT / mm SCALE 1:1

PROJECTION