


P.C.B. LAYOUT
SCALE 2.00

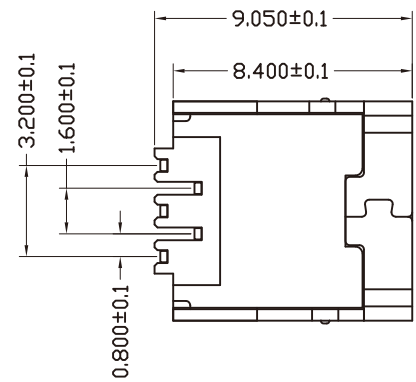

Note:

1.Material:

- 1.1 Insulator: PBT UL 94-V0 rated
- 1.2 Contact: phosphor bronze, t=0.25mm
- 1.3 Shell: brass, t=0.4mm

2.specification:

- 2.1 Current rating: 1A MAX
- 2.2 Dielectric withstanding voltage: 500 v(ac) far minuta
- 2.3 Contact resistance: 30 mΩ max
- 2.4 Insulation resistance: 1000 mΩ min at DC 500V.
- 2.5 Temperature range: -55° C~+105° C

3.Finishes:

- 3.1 Contacts: Gold flashed 1U",3U",5U",10U",15U",30U"
- 3.2 Shell: Nickel plated.

3	MINI USB 5P銅殼	1	Brass	T=0.4±0.02mm	Nickel Plated
2	MINI USB 5PIN 90° 母端 (短) (2 PIN)	5	PHOSPHOS BRONZE	T=0.25±0.02mm	Gold Plated Over Tin
	MINI USB 5PIN 90° 母端 (長) (3 PIN)				
1	膠心	1	P.B.T+30%GF		Black/Blue/White
No.	Part Name	Q'ty	Material	Thickness	Finish

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE


SIZE A4

- X, ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±

P PROJECTION



ORDER INFORMATION

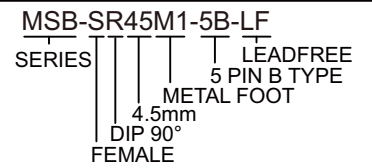

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com