
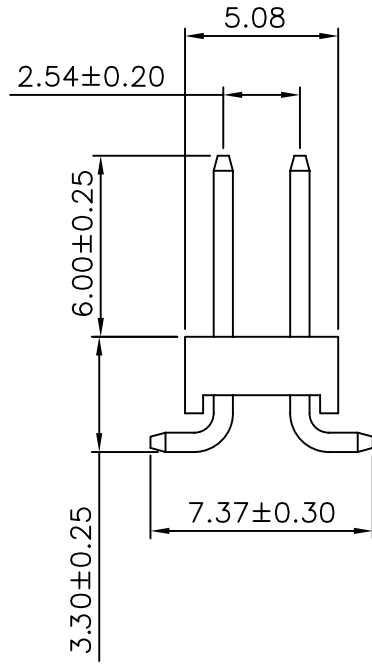


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

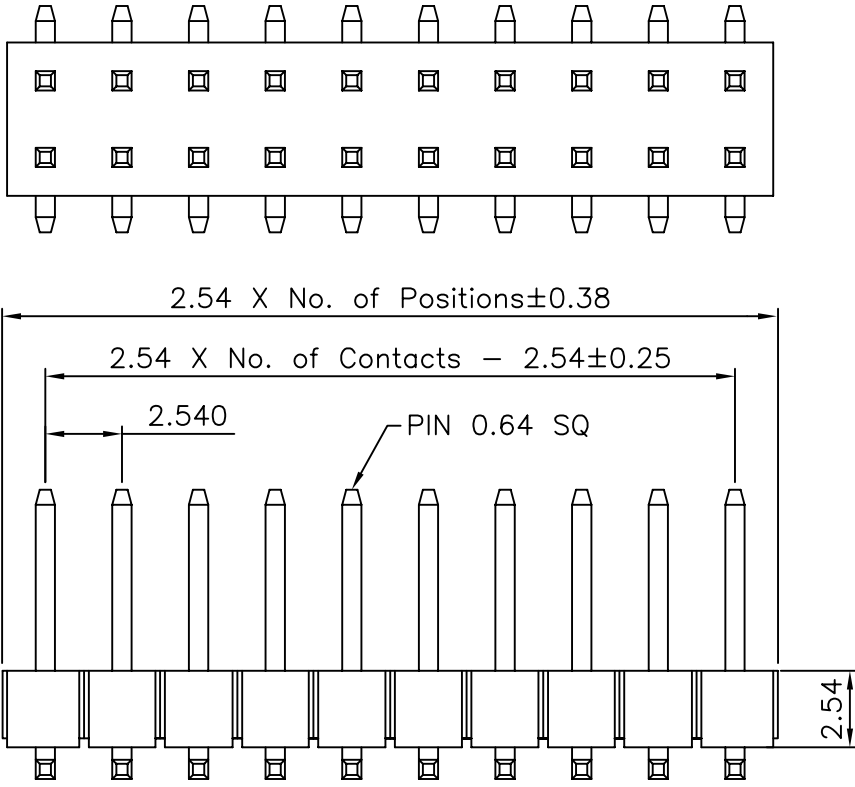

Specifications


Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper alloy
 Insulator Material: Polyester, UL94V-0
 NYLON-6T

H-V33X-2Xxx-LF
 LEADFREE
 POSITION PER ROW
 RoHS Compliant

Recommended P.C.Board
 Layout

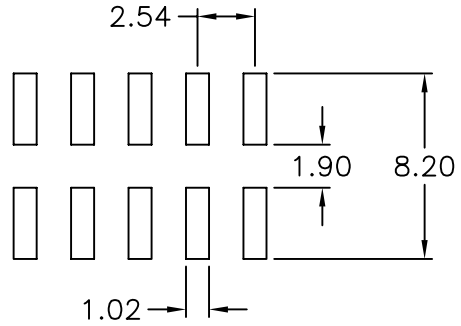

PART NO. H-V33X-2Xxx		APPROVED BY CY		TOLERANCES ARE .X ± 0.38 .XX ± 0.25 .XXX ± 0.13 AWG	DESCRIPTION: 254 PIN HEADER DUAL ROW SMT TYPE BASE 2.54
DWG NO. H-V33X-2Xxx		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE

煜倫股份有限公司