

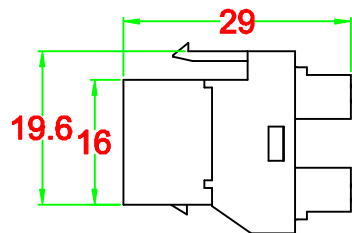



Dimensions : m/m



**Performance:**

Meets Cat.5e EIA/TIA 568B.1 Standard.

**Materials:**

- Plastic Body : Fireproof ABS UL-94V0
- RJ-45 Jack : 8P8C 50 micro inches gold plated
- PCB : FR-4 / 1.0mm UL-94V0
- IDC Body : Fireproof ABS UL-94V0
- IDC Pin : Bronze & Tinned

Label Color Code: T568 A/B

IDC Description: For 22-26 AWG.  
For 110 or Krone punch-down Tool

**Electrical Specifications:**

- Insulation Resistance : 500M ohms (min.)
- Contact Resistance : 20m ohms (max.)
- Current Rating : 1.5 Amps .
- DC Resistance : 0.1 ohm (max.)
- Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

**Mechanical Specifications:**

- IDC Punch Down Cycle : Over 25 Cycles (min.)
- RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 ~ +70 degree / C

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ± 0.20  
.XX ± 0.10  
.XXX ±  
ANG ±



ORDER INFORMATION

MJK16C5E-CxP50-0808-LF

SERIES | 8P8C | LEADFREE  
| 50u" GOLD  
| PLASTIC  
| W: WHITE  
IDC K: BLACK Y: YELLOW B: BLUE  
R: RED G: GREEN H: GREY

DESCRIPTION: Cat.5e 180 Degree Narrow Keystone Jack (UTP) / Dual Type(Krone & 110)