


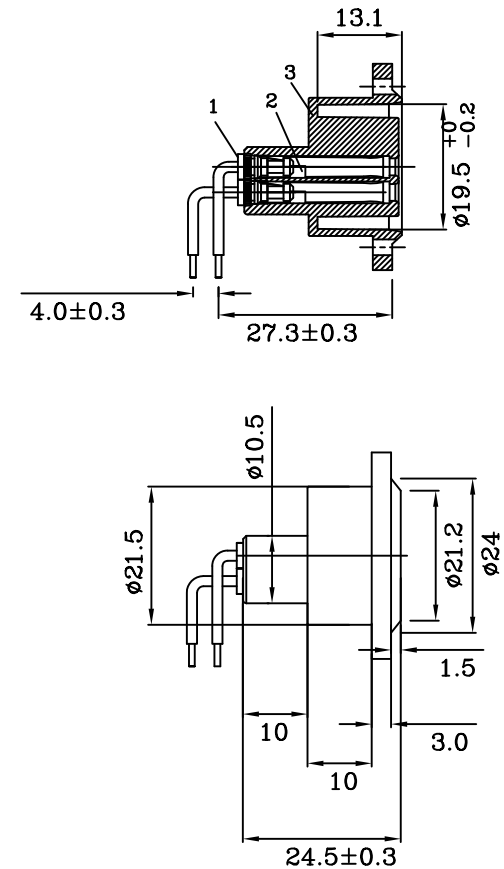

PANEL CUT OUT
(FRONT SIDE)

Specification
Contact resistance:<5mΩ
Insulation resistance:1GΩ
Delectric strength:1500Vdc
Insertion/withdrawal force:<20N
Life time(mating cycles):>1000
Temperature range:-30℃ TO +80℃

Specification

Contact resistance:<5mΩ
Insulation resistance:1GΩ
Delectric strength:1500Vdc
Insertion/withdrawal force:<20N
Life time(mating cycles):>1000
Temperature range:-30℃ TO +80℃