


Recommended P.C.B Layout

**MATERIAL**

Insulator : 30% Glass fiber PBT  
Contact Pin : Brass, Gold Flash

**SPECIFICATION**

Current Rate : 3 AMP  
Insulation Resistance : 5000MΩMin. at DC 500V  
Contact Resistance : 20mΩMax. at DC 100mA  
Dielectric Voltage : AC 500V for one minute  
Operation Temperature : -40°C to + 105°C

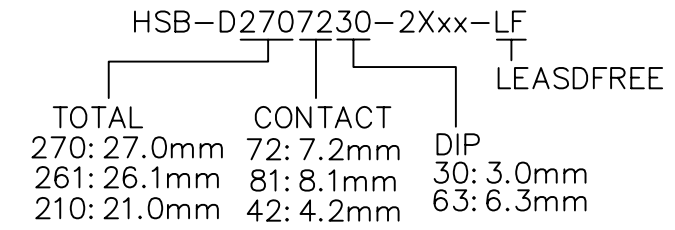

RoHS Compliant



PART NO. HSB-Dxxxxyyzz-2Xxx	
DWG NO. HSB-Dxxxxyyzz-2Xxx	
FILE NO.	DRAWING BY
UNIT / mm	SCALE 1:1

APPROVED BY CY	TOLERANCES ARE .X ± 0.3 .XX ± 0.2 .XXX AWG
DRAWING BY	
PROJECTION	

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT STACK	
AREA	REVISIONS
HK	DATE

煜倫股份有限公司