


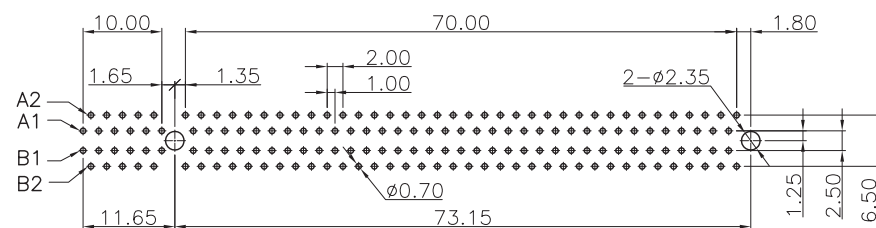



0.80+0.15
-0.05



SECTION:A-A

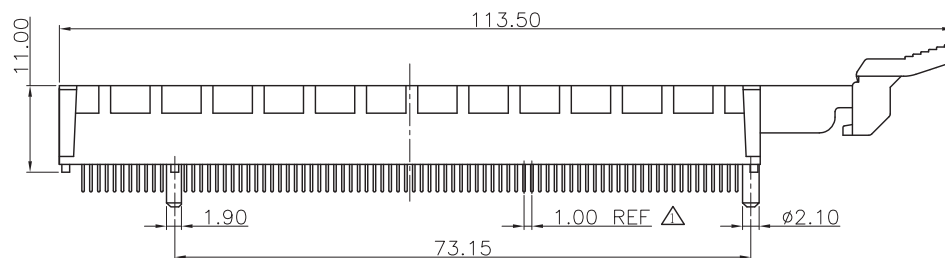

RECOMMENDED PCB LAYOUT



NOTE:
MATERIAL:
HOUSING:THERMOPLASTIC(NYLON+GF)
CONTACT:BRASS
PLATING:
CONTACT: GOLD PLATING
SPECIFICATION:
VOLTAGE RATING: 50V
CURRENT RATING: 1.1A
CONTACT RESISTANCE TERMINAL:20mΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE:500V AC
INSULATION RESISTANCE:1000MΩ MIN

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION



ORDER INFORMATION

PCIX-DLP-164-LF

SERIES
DIP 180°
164WAY
PUSH LOCK
LEADFREE

DESCRIPTION: PCI 1.0 164P 旋轉式成品