

Ø1.09-Ø1.04 Dia of finished hole after plating
 Drilled hole Dia. Ø1.17-% 1.13
 Tin/Lead plated 0.005 Min.
 Copper plating 0.025-0.075
 (Follow SPEC. -PC-104)

Recommend P.C.B. Layout
 TOP View

SPECIFICATIONS
 CURRENT RATING: 3 AMPS
 INSULATOR RESISTANCE: 5000 MEGPHMS MIN.
 CONTACT RESISTANCE: 20 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING: AC 500V
 OPERATING TEMPERATURE: -25°C ~ +85°C

MATERIAL
 CONTACT: PHOSPHOR BRONZE (GOLD FLUSH)
 INSULATOR: PA-9T, UL 94V-0

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.50


.X ± 0.35

.XX ± 0.25


.XXX ± 0.05

ANG ±

PJECTION



ORDER INFORMATION

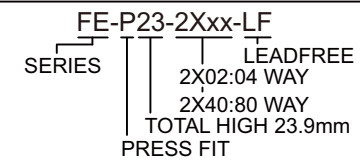

DESCRIPTION: PC-104 Connector